


## YSLYCY SHIELDED PVC CONTROL CABLE

SAB02440467/04K  
YSLYCY-JZ 4G95 mm<sup>2</sup>

- Flexible
- Numbered wires
- Good EMC properties

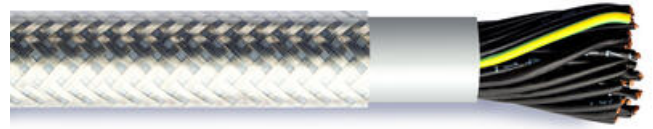

### PRODUCT DESCRIPTION

YSLYCY control and connection cable is suitable for multitude of applications in various industries, such as machining tools, automotive industry, CNC-routers and packaging machines. In order to achieve the optimal EMC-properties the copper screen has to be grounded.

### SPECIFICATIONS

<b>Number Of leads</b>	4
<b>Cross-Section</b>	95 mm <sup>2</sup>
<b>Material Outer Jacket</b>	PVC
<b>Shielded</b>	Yes
<b>Nominal Voltage</b>	U <sub>o</sub> /U 300/500 V
<b>Diameter Outer -5%</b>	57 mm
<b>Temperature Range The Use Of</b>	-40 °C
<b>Temperature Range For Flexible Use</b>	80 °C
<b>Temperature Range Flexible Use Of</b>	-5 °C
<b>Bending Radius Fixed Laying</b>	Min. 7,5 x d
<b>Bending Radius Flexible Use</b>	Min. 7,5 x d
<b>Copper Weight</b>	4050 kg/km
<b>Weight</b>	5849 kg/km
<b>Core Insulation</b>	PVC
<b>Core identification</b>	Number Coded
<b>Approvals</b>	RoHS
<b>Test Voltage</b>	4000 V
<b>Area of application</b>	Flexible use
<b>Colour Outer Sheath</b>	Transparent

