


## CAN BUS CABLE

SAB06282501/K  
S CB 628 1x2x0,5 mm<sup>2</sup>

- CAN Bus cables for mobile applications
- Color coded cores according to DIN 47100

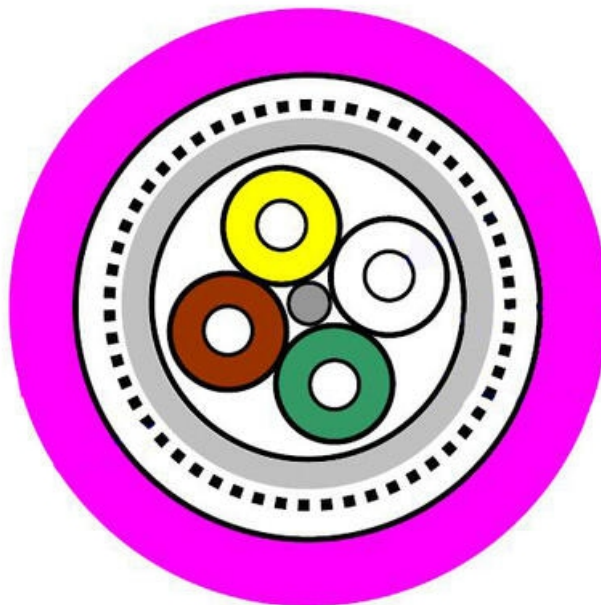

### PRODUCT DESCRIPTION

S CB 628 is a halogen-free CAN-Bus cable for cable tracks with UL approval. It is used for the exchange of digital information. CAN-Bus cables are recommended as highly flexible data cables in cable tracks.

### SPECIFICATIONS

Number Of leads	2
Cross-Section	0.5 mm <sup>2</sup>
Material Outer Jacket	PUR
Shielded	Yes
Diameter Outer -5%	8.7 mm
Temperature Range The Use Of	-40 °C
Temperature Range For Flexible Use	70 °C
Temperature Range Flexible Use Of	-40 °C
Bending Radius Flexible Use	7,5 x d
Copper Weight	29 kg/km
Weight	74 kg/km
Core Insulation	SABIX®
Core identification	Colour Coded
Halogen	No

<b>Drag Chain Tested</b>	Yes
<b>Color Jacket</b>	Violet
<b>Twister pairs</b>	Yes
<b>Number of cores and cross-section mm<sup>2</sup></b>	1 x 2 x0 ,50mm <sup>2</sup>