


## CAN BUS CABLE

SAB06289021/08K  
CAN Bus cable 2x2x0,5 mm<sup>2</sup>

- CAN Bus cables for mobile applications
- Color coded cores according to DIN 47100

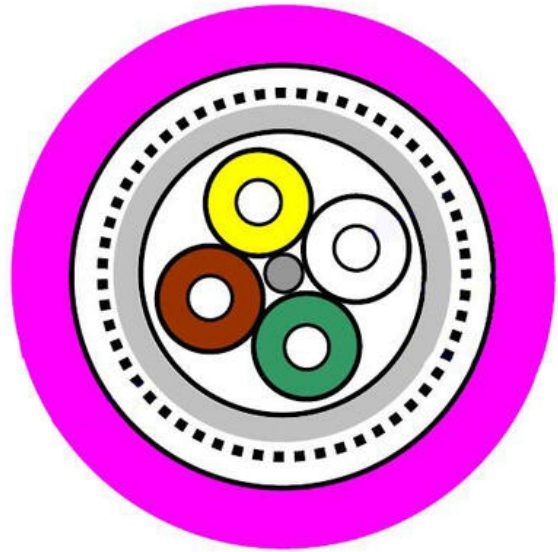

### PRODUCT DESCRIPTION

S CB 628 is a halogen-free CAN-Bus cable for cable tracks with UL approval. It is used for the exchange of digital information. CAN-Bus cables are recommended as highly flexible data cables in cable tracks.

## SPECIFICATIONS

<b>Number Of leads</b>	4
<b>Cross-Section</b>	0.5 mm <sup>2</sup>
<b>Material Outer Jacket</b>	PUR
<b>Shielded</b>	Yes
<b>Diameter Outer -5%</b>	8.2 mm
<b>Temperature Range The Use Of</b>	-40 °C
<b>Temperature Range For Flexible Use</b>	80 °C
<b>Temperature Range Flexible Use Of</b>	-35 °C
<b>Bending Radius Fixed Laying</b>	3xD
<b>Bending Radius Flexible Use</b>	10xD
<b>Core Insulation</b>	TPE
<b>Core identification</b>	Colour Coded
<b>Approvals</b>	UL
<b>Halogen</b>	Yes
<b>Drag Chain Tested</b>	No

<b>Color Jacket</b>	Violet
<b>Twister pairs</b>	Yes
<b>Number of cores and cross-section mm<sup>2</sup></b>	2 x 2 x 0,5mm <sup>2</sup>