

## MHM5 ABSOLUTE SHAFT ENCODER

MHM510-DNET-001

Absolute encoder, DeviceNet

- Diameter 58mm, shaft diameter 10mm
- Resolution (Max): 13x16 bits
- CANopen, DeviceNet, Ethercat, Ethernet/IP, Interbus, Modbus, Parallel, Profibus, Profinet
- IP64, IP66 available




### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Sensor type            | Absolute                                         |
| Housing diameter       | 58 mm                                            |
| Shaft Diameter         | 10 mm                                            |
| Resolution             | Max. 13 bit resoluutiolle ja 12 bit kierroksille |
| Connection Thread      | Screw terminal                                   |
| IP Class               | IP64                                             |
| Speed max.             | 6000 rpm                                         |
| Supply Voltage DC Min  | 10 V DC                                          |
| Supply Voltage DC Max  | 30 V DC                                          |
| Temperature range from | -40 °C                                           |
| Temperature range to   | 85 °C                                            |
| Output                 | Device-Net                                       |
| Version                | Multiturn                                        |

| PROGRAMMABLE PARAMETERS      |                                                                                                                                                                                         |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Parameter          | This parameter determines the counting direction, in which the output code increases or decreases. As an important operating parameter the code sequence (complement) can be programmed |
| Resolution per turn          | Value between 1 and 8192 can be programmed                                                                                                                                              |
| Total resolution "Max range" | This parameter is used to program the desired number of measuring units over the total measuring range. This value may not exceed the total resolution of the absolute rotary encoder.  |
| Preset Value                 | The preset value is the desired position value, which should be reached at a certain physical position of the shaft.                                                                    |
| Limit Switch, Min. and Max   | Two position values can be programmed as limit switches. By reaching these values one bit of the 32 bit process value is set to high level                                              |
| Cam                          | One free programmable cam can be set in the total measuring range                                                                                                                       |

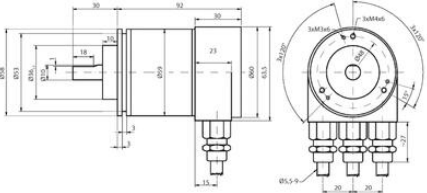

| PROGRAMMABLE PARAMETERS      |                                                                                                                                                                                         |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Parameter          | This parameter determines the counting direction, in which the output code increases or decreases. As an important operating parameter the code sequence (complement) can be programmed |
| Resolution per turn          | Value between 1 and 8192 can be programmed                                                                                                                                              |
| Total resolution "Max range" | This parameter is used to program the desired number of measuring units over the total measuring range. This value may not exceed the total resolution of the absolute rotary encoder.  |
| Preset Value                 | The preset value is the desired position value, which should be reached at a certain physical position of the shaft.                                                                    |
| Limit Switch, Min. and Max   | Two position values can be programmed as limit switches. By reaching these values one bit of the 32 bit process value is set to high level                                              |
| Cam                          | One free programmable cam can be set in the total measuring range                                                                                                                       |

