ULTRASONIC BARRIER P48

P48-30-R30-PNO-2M
Ultrasonic sensor, receiver/transmitter, 300mm, PNP, NO, cable




- Sensing distance 0-300 mm or 0-1100 mm
- Output PNP or NPN
- 2m connecting cable


PRODUCT DESCRIPTION

SPECIFICATIONS


Distance Max	300 mm
Distance Min	0 mm
Electrical connection	Cable 2 m
IP Class	IP67
Material of body	PBT
Operating Frequency	150 Hz
Supply Voltage DC Max	30 V DC
Supply Voltage DC Min	18 V DC
Temperature range from	-15 °C
Temperature range to	60 °C

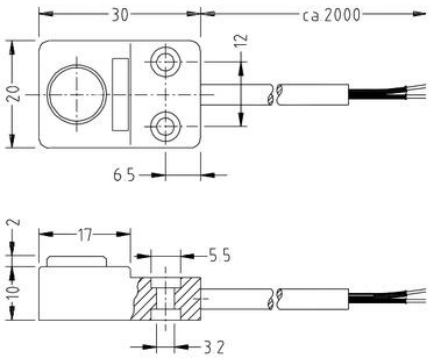


Brown/ Braun/ Marron	+24 V DC
Blue/ Blblau/ Bleu	GND

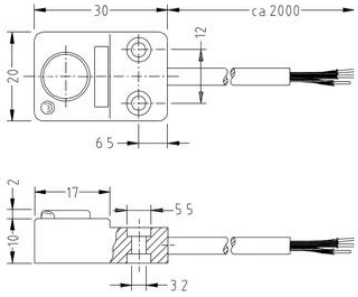

Brown/ Braun/ Marron	+24 V DC
Blue/ Blau/ Bleu	GND
Black/ Schwarz/ Noir	Output/ Ausgang/ Sortie

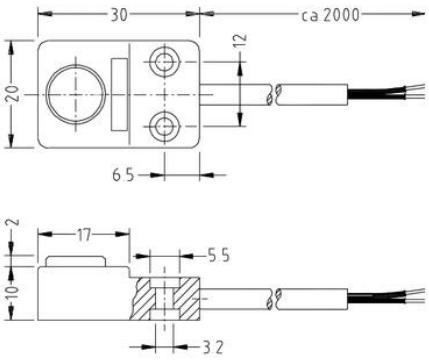

Brown/ Braun/ Marron	+24 V DC
Blue/ Blau/ Bleu	GND

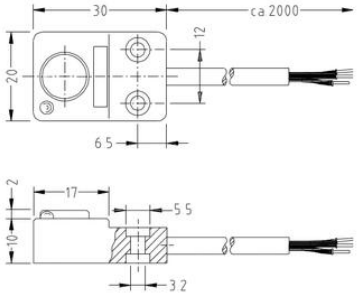

Brown/ Braun/ Marron	+24 V DC
Blue/ Blau/ Bleu	GND
Black/ Schwarz/ Noir	Output/ Ausgang/ Sortie