

ULTRASONIC BARRIER P48

P48-30-R30-PNO-2M

Ultrasonic sensor, receiver/transmitter, 300mm, PNP, NO, cable





- Sensing distance 0-300 mm or 0-1100 mm
- Output PNP or NPN
- 2m connecting cable





PRODUCT DESCRIPTION

SPECIFICATIONS



Distance Max	300 mm
Distance Min	0 mm
Electrical connection	Cable 2 m
IP Class	IP67
Material of body	PBT
Operating Frequency	150 Hz
Supply Voltage DC Max	30 V DC
Supply Voltage DC Min	18 V DC
Temperature range from	-15 °C
Temperature range to	60 °C

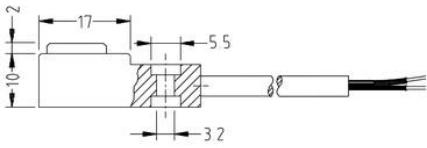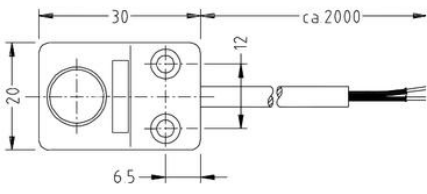



Brown/ Braun/ Marron +24 V DC
 Blue/ Blau/ Bleu GND

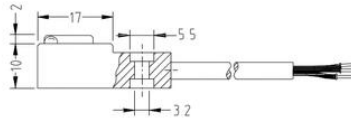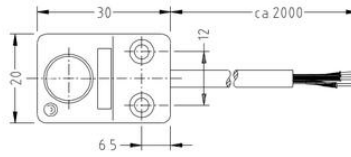

Brown/ Braun/ Marron +24 V DC
 Blue/ Blau/ Bleu GND
 Black/ Schwarz/ Noir Output/ Ausgang/ Sortie

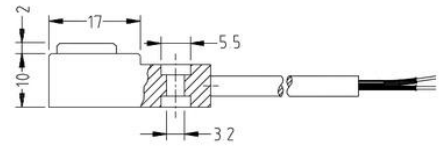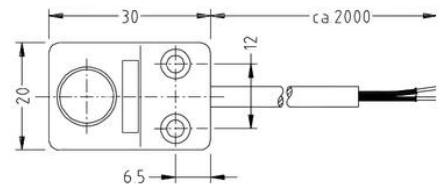

Brown/ Braun/ Marron +24 V DC
 Blue/ Blau/ Bleu GND

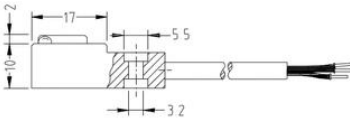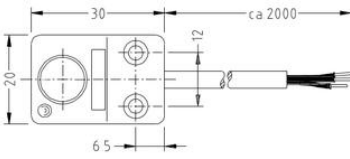

Brown/ Braun/ Marron +24 V DC
 Blue/ Blau/ Bleu GND
 Black/ Schwarz/ Noir Output/ Ausgang/ Sortie