

ULTRASONIC BARRIER P48

P48-110-R50-PNC2MB

Ultrasonic sensor, receiver/transmitter, 1,1m, PNP, NC, cable


- Sensing distance 0-300 mm or 0-1100 mm
- Output PNP or NPN
- 2m connecting cable




PRODUCT DESCRIPTION


SPECIFICATIONS

Distance Max	1100 mm
Distance Min	0 mm
Electrical connection	Cable 2 m
IP Class	IP67
Material of body	PBT
Operating Frequency	150 Hz
Supply Voltage DC Max	30 V DC
Supply Voltage DC Min	18 V DC
Temperature range from	-15 °C
Temperature range to	60 °C

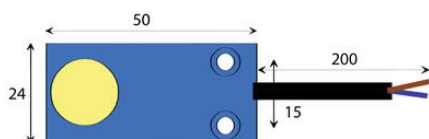


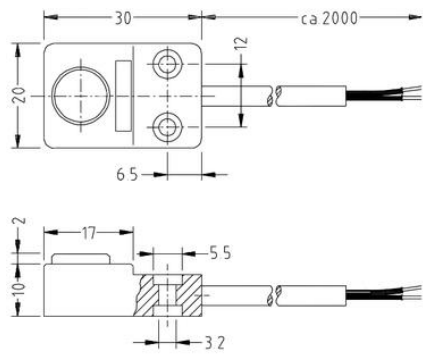


Brown/ Braun/ Marron +24 V DC
Blue/ Blau/ Bleu GND

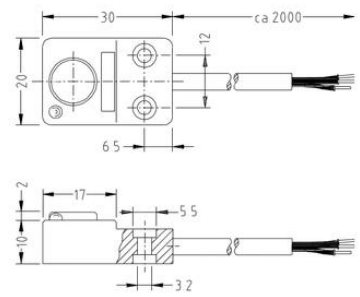

Brown/ Braun/ Marron +24 V DC
Blue/ Blau/ Bleu GND
Black/ Schwarz/ Noir Output/ Ausgang/ Sortie

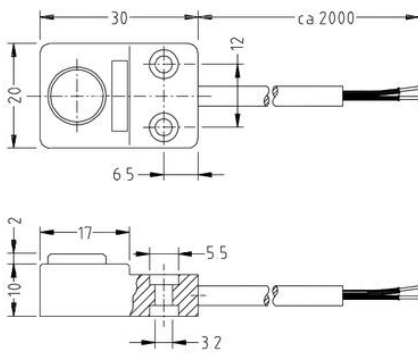

Brown/ Braun/ Marron +24 V DC
Blue/ Blau/ Bleu GND



Brown/ Braun/ Marron +24 V DC
Blue/ Blau/ Bleu GND
Black/ Schwarz/ Noir Output/ Ausgang/ Sortie