ADVANCED ILLUMINATION - AL150 BALA LIGHTING

Broad Area Linear Array

SERIE-AL150
AL150 bar light



- Designed to handle a long, wide field with low angle of view
- Available in 25 mm (1 ") increments up to 80"

PRODUCT DESCRIPTION

Designed for applications that require broad illumination over a wide area, or for applications requiring an even broader field of illumintion, utilise 2 BALA bar lights in parallel.
The AL150 bar light series is expandable in 1" increments up to 82".

Power options include:

- C1 connector - for use with DCS series controllers
- C5 connector - for use with Pulsar 320 strobe controller
- Continuous in-line controller - powered by 24V power supply
- Combination strobe/continuous in-line controller - powered by 24V power supply
- Default-OFF strobe/continuous in-line controller - powered by 24V power supply
- Flying/tinned leads - powered by 24V power supply

Other Wavelength options:

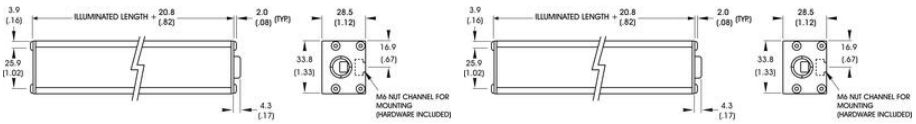
- UV - 395
- Blue - 470
- Green - 520
- Red - 625, 660
- Infrared - 880
- White - WHI

For enquiries or quotes for sizes and power options not listed here please contact us.

SPECIFICATIONS

Wave-Length	WHI, 395, 470, 520, 625, 660, 880
Approvals	CE, RoHS
IP Class	IP50

Temperature range from	0 °C
Temperature range to	60 °C
Feed	C1, C5, IC, I3, I3S, 24
Life Span	50000 h


3.9
(.16)
ILLUMINATED LENGTH + 20.8
(.82)
2.0
(.08) (TYP)
25.9
(1.02)
4.3
(.17)
28.5
(1.12)
16.9
(.67)
33.8
(1.33)
M6 NUT CHANNEL FOR
MOUNTING
(HARDWARE INCLUDED)
3.9
(.16)
ILLUMINATED LENGTH + 20.8
(.82)
2.0
(.08) (TYP)
25.9
(1.02)
4.3
(.17)
28.5
(1.12)
16.9
(.67)
33.8
(1.33)
M6 NUT CHANNEL FOR
MOUNTING
(HARDWARE INCLUDED)