ADVANCED ILLUMINATION - EUROBRITE BAR LIGHT

Area LED Lighting

SERIE-AL-S025300
AL-S025300 bar light



- On-Board Smart Drive - Straight loop between strobe and continuous operation
- Adaptive OverDrive - Optimized operation at strobe
- Thermal Foldback - Overheat protection
- Daisy-Chain - Connect up to 4 devices

PRODUCT DESCRIPTION

The Eurobrite™ from Advanced Illumination, provides industry leading technology with value/pricing for inmached performance, complete with built-in control for continuous and strobe modes.
A feature of the Eurobrite™ is Adaptive Power™ which utilises onboard thermister to maximize light output in continuous mode. For strobe mode, Adapative Overdrive™ provides a maximal output pulse regardless of the exposure period.

Additional features of the Eurobrite™:

- IP67 sealed enclosure suitable for washdown environments.
- Rugged construction that has been tested to withstand over 1000lb.
- Industrial grade LEDs providing high-intensity illumination of 45klux (working distance of 200mm).
- Daisy chain up to 4 for a combined length of 48”.
- Medium and wide spread lends options

Other wavelength options available:

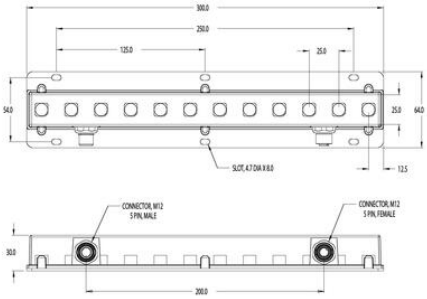
- Royal blue - 455
- Blue - 470
- Cyan - 505
- Green - 530
- Amber - 590
- Red orange -625
- Red - 660
- Infrared - 730, 850, 940
- White - WHI

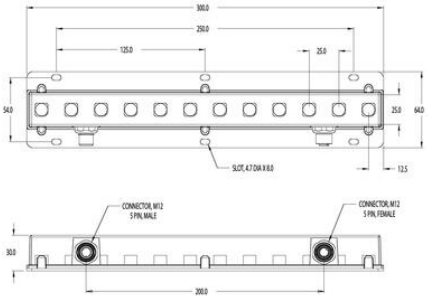
For enquiries or quotes for wavelength options not listed here please contact us.

SPECIFICATIONS

Wave-Length	WHI, 455, 470, 505, 530, 590, 625, 660, 730, 850, 940
Approvals	CE, RoHS
IP Class	IP67

Temperature range from	0 °C
Temperature range to	60 °C
Feed	M12
Life Span	50000 h


300.0
250.0
125.0
25.0
54.0
25.0
64.0
SLOT, 4.7 DIA X 8.0
12.5
CONNECTOR, M12
5 PIN, MALE
CONNECTOR, M12
5 PIN, FEMALE
30.0
200.0


300.0
250.0
125.0
25.0
54.0
25.0
64.0
SLOT, 4.7 DIA X 8.0
12.5
CONNECTOR, M12
5 PIN, MALE
CONNECTOR, M12
5 PIN, FEMALE
30.0
200.0