ADVANCED ILLUMINATION - AL143 AREA LIGHTING

2x3 spot light

SERIE-AL143
AL143 spot light



- Bright area lighting for long distances or large work areas
- Compact design - only 28 mm high
- M6 nut ducts for easy installation

PRODUCT DESCRIPTION

The AL143 spot/bar light is in a 2x3 design, available in a wide range of wavelengths and multiple lens options. It is the ideal illumination for medium working distances, with convenient mounting with an M4 nut channel.

Power options include:

- C1 connector - for use with DCS series controllers
- C5 connector - for use with Pulsar 320 strobe controller
- Continuous in-line controller - powered by 24V power supply
- Combination strobe/continuous in-line controller - powered by 24V power supply
- Default-OFF strobe/continuous in-line controller - powered by 24V power supply
- Flying/tinned leads - powered by 24V power supply

Other Wavelength options:

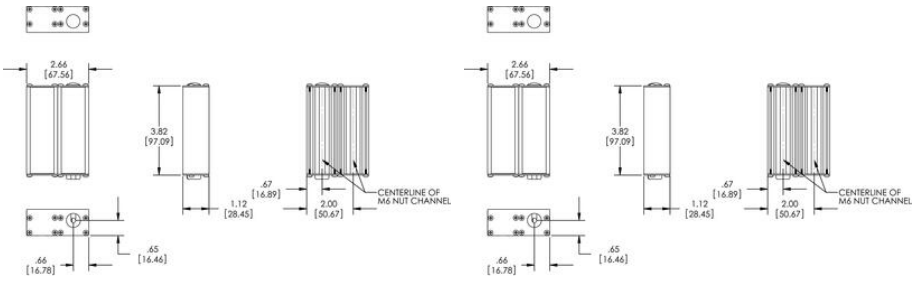
- UV - 365, 375, 385, 395, 405
- Royal blue - 455
- Blue - 470
- Cyan - 505
- Green - 530
- Amber - 590
- Red orange - 625
- Infrared - 730, 850, 940
- White - WHI

For enquiries or quotes for wavelength and power options not listed here please contact us.

SPECIFICATIONS

Wave-Length	WHI, 365, 375, 385, 395, 405, 455, 470, 505, 590, 625, 660, 730, 850, 940
Approvals	CE, RoHS
IP Class	IP50, IP65

Temperature range from	0 °C
Temperature range to	60 °C
Feed	C1, C5, IC, I3, I3S, 24
Life Span	50000 h


2.66
[67.56]
3.82
[97.09]
1.12
[28.45]
.67
[16.89]
2.00
[50.67]
CENTERLINE OF
M6 NUT CHANNEL
.65
[16.46]
.66
[16.78]