ADVANCED ILLUMINATION - AL126 LED BAR LIGHT

High dispersion, narrow

SERIE-AL126
AL126 bar light



- Lighting with high intensity LEDs in compact format, only 20 mm wide
- Easy mounting with M4 nut channel
- Expandable in 2 inch increments from 2 "to 40"
- Available in WASH DOWN variant

PRODUCT DESCRIPTION

The AL126 is a high dispersion LED bar light for reflective services and shorter working distances. It provides a narrower and less intense illumination area than AL116. Available with polarisation and diffusion light conditioning, along with a wide spectrum of wavelengths. IP65 compliant washdown option is also available.
This expandable compact bar light is pre-engineered for custom lengths in 2″ increments up to 40″.

Power options include:

- C1 connector - for use with DCS series controllers
- C5 connector - for use with Pulsar 320 strobe controller
- Continuous in-line controller - powered by 24V power supply
- Combination strobe/continuous in-line controller - powered by 24V power supply
- Default-OFF strobe/continuous in-line controller - powered by 24V power supply
- Flying/tinned leads - powered by 24V power supply

Other Wavelength options:

- UV - 365, 375, 385, 395, 405
- Royal blue - 455
- Blue - 470
- Cyan - 505
- Green - 530
- Amber - 590
- Red orange - 625
- Red - 660
- Infrared - 730, 850, 940
- White - WHI


For enquiries or quotes for wavelength, power options and sizes not listed here please contact us.

SPECIFICATIONS


Wave-Length	WHI, 365, 375, 385, 395, 405, 455, 470, 530, 590, 625, 850, 940
Approvals	CE, RoHS
IP Class	IP50, IP65

Temperature range from	0 °C
Temperature range to	60 °C
Feed	C1, C5, IC, I3, I3S, 24

Life Span	50000 h

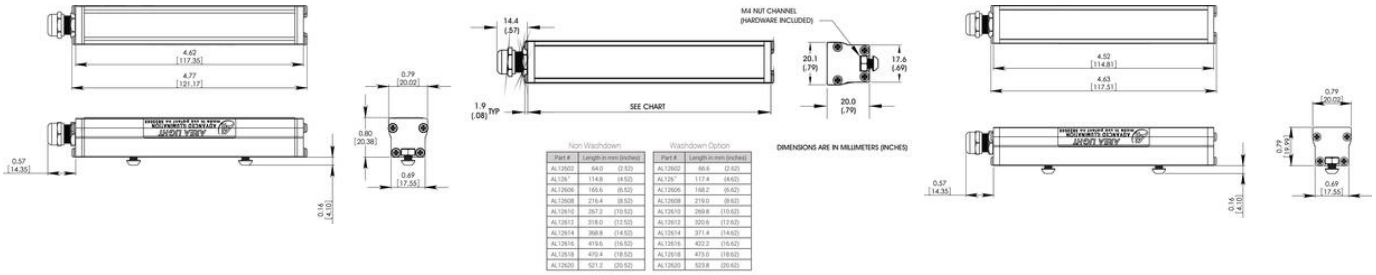

Part #	Length in mm (inches)		Part #	Length in mm (inches)	
AL12602	64.0	(2.52)	AL12602	66.6	(2.62)
AL1267	114.8	(4.52)	AL1267	117.4	(4.62)
AL12606	165.6	(6.52)	AL12606	168.2	(6.62)
AL12608	216.4	(8.52)	AL12608	219.0	(8.62)
AL12610	267.2	(10.52)	AL12610	269.8	(10.62)
AL12612	318.0	(12.52)	AL12612	320.6	(12.62)
AL12614	368.8	(14.52)	AL12614	371.4	(14.62)
AL12616	419.6	(16.52)	AL12616	422.2	(16.62)
AL12618	470.4	(18.52)	AL12618	473.0	(18.62)
AL12620	521.2	(20.52)	AL12620	523.8	(20.62)

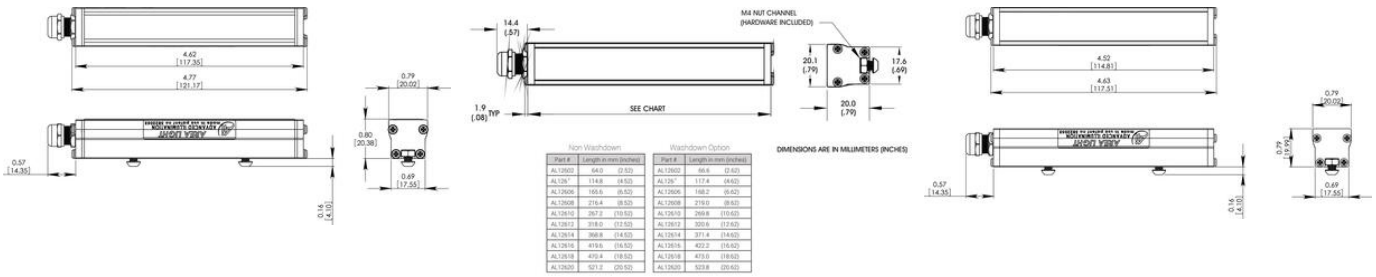

Part #	Length in mm (inches)		Part #	Length in mm (inches)	
AL12602	64.0	(2.52)	AL12602	66.6	(2.62)
AL1267	114.8	(4.52)	AL1267	117.4	(4.62)
AL12606	165.6	(6.52)	AL12606	168.2	(6.62)
AL12608	216.4	(8.52)	AL12608	219.0	(8.62)
AL12610	267.2	(10.52)	AL12610	269.8	(10.62)
AL12612	318.0	(12.52)	AL12612	320.6	(12.62)
AL12614	368.8	(14.52)	AL12614	371.4	(14.62)
AL12616	419.6	(16.52)	AL12616	422.2	(16.62)
AL12618	470.4	(18.52)	AL12618	473.0	(18.62)
AL12620	521.2	(20.52)	AL12620	523.8	(20.62)