

## NUVO-7160GC -SERIES INDUSTRIAL COMPUTERS

N7160GC-I5

Nuvo-7160GC Intel® Core™ i5-8500

- Intel® 8th Gen. Core™ processor
- GPU support: up to 120W cards
- 6x GigE, optional PoE for ports # 3-6
- 4x USB 3.1Gen2 + 4x USB 3.0 Gen1
- M.2 2280 NVME/Optane socket



### PRODUCT DESCRIPTION

Nuvo-7160GC is a ruggedized GPU-aided edge computing platform designed for modern machine learning applications such as autonomous driving, facial recognition and machine vision. It supports up to a 120W GPU, delivering 4~6 TFLOPS computing power for inference, as well as Intel® 8th-Gen Coffee Lake Core™ 6-core/ 12-thread CPU, offering up to 50% CPU performance enhancement over previous generations.

Thanks to Neousys' patented Cassette design and ingenious ventilation mechanism, Nuvo-7160GC can effectively dissipate the heat generated by the GPU. By introducing the guided airflow from intake to exhaust with powerful fans featuring smart fan control, it allows a 120W GPU to operate at 60°C ambient temperature under 100% GPU loading.

Nuvo-7160GC incorporates rich I/O functions such as USB 3.1 Gen2/ Gen1, GbE, COM and MezIO™ interface in its restricted footprint. It also leverages cutting-edge M.2 NVMe SSD technology for over 2000MB/s disk read/ write speed or Intel® Optane™ memory for the ultimate system acceleration. Neousys Nuvo-7160GC is the ideal solution for emerging edge computing by combining exceptional CPU and GPU performances.


#### Features:

- Supports NVIDIA® GPU graphics card up to 120W TDP
- Patented thermal design to allow -25°C to 60°C wide temperature range operation
- Intel® 8th-Gen Core™ hexa-core 35W/ 65W LGA1151 CPU
- 6x GigE ports, supporting 9.5 KB jumbo frame
- M.2 2280 M key socket (Gen3 x4) supporting NVMe SSD or Intel® Optane™ memory
- 4x USB 3.1 Gen2 ports and 4x USB 3.1 Gen1 ports
- Accommodates two 2.5" SATA HDD/ SSD with RAID 0/ 1 support
- Compatible with MezIO™ interface for function expansion
- Patented ventilation design\* for graphics card


### SPECIFICATIONS

AMT	Intel AMT 12
Chipset	Intel Q370 Platform Controller Hub
DC Input	3-pin plug
Depth	225 mm
GPU	Yes
Height	111 mm

Memory RAM	32 GB
Processor	Intel® Core™ i5-8500
Remote Control	Yes
Supply Voltage DC Max	35 V DC
Supply Voltage DC Min	8 V DC
Temperature range bearing, from	-40 °C
Temperature range bearing, to	85 °C
Temperature range from	-25 °C
Temperature range to	60 °C
TPM	TPM 2.0
Weight	4.5 kg
Width	240 mm

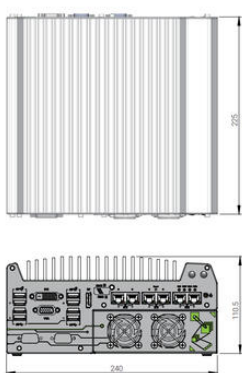

Unit : mm

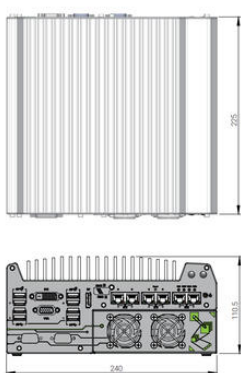

Unit : mm