

HONSBERG - RVM SERIES FLOW SWITCH

Piston

RVM-008GM013
 Flow switch 1/4", 40-130 ml/min

- Switching Range 0,04..3 l/m H₂O
- Water (gas and aggressive media available on request)
- G $\frac{1}{4}$ "
- Brass or Stainless Steel Wetted Parts
- Max Pressure 300 bar






PRODUCT DESCRIPTION




Mechanical flow switch, for fluid media, with magnetic triggering of a reed switch. Robust construction in brass or stainless steel.

SPECIFICATIONS

Contact Rating Max	20 VA
Flow Max l/min Double	0,17 l/min
Flow Range Max	0,13 l/min
Flow Range Min	0,04 l/min
IP Class	IP65
Material Bolt	Brass
Material of body	Nickel-plated brass
Material of seals	NBR
Materials Spring	Stainless steel 316Ti
Pressure Range Max	300 bar
Temperature range of media to	100 °C
Type of flow component	Flow Switches
Weight	0,14 kg
Viscosity	1 cSt
Voltage AC max	200 V

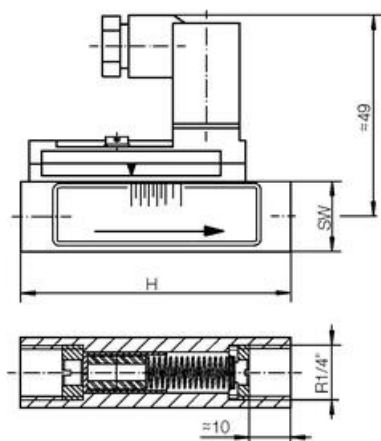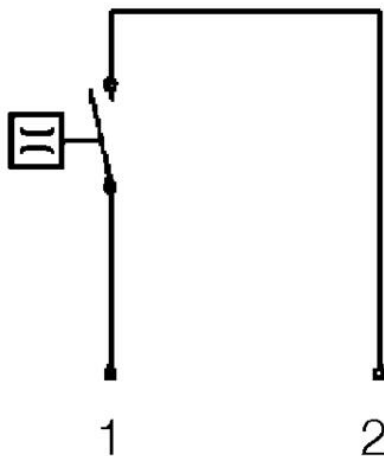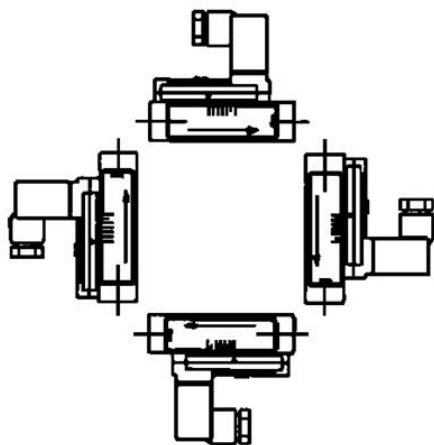

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15

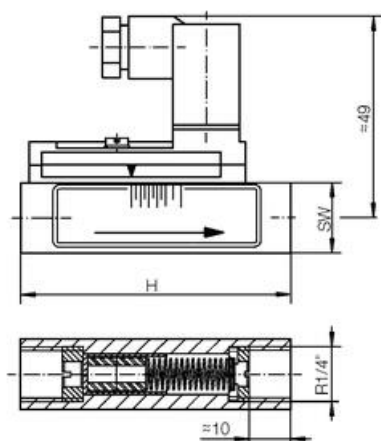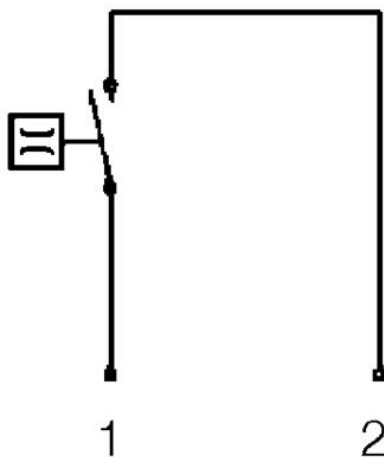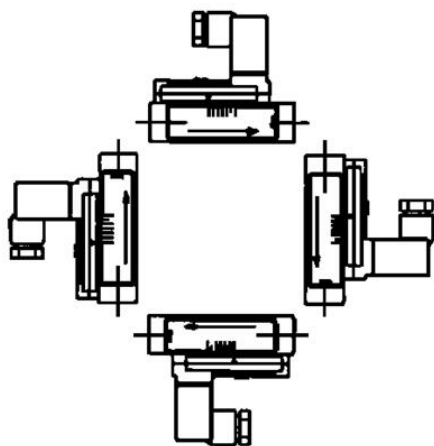

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15