

FLOW INDICATOR WITH TURNABLE SCALE

NOK-008GM015

Flow meter w. switch 1/4", 3-15 l/min

- For liquids and gases up to 50 bar pressure
- Flow from 3 to 60 l/min. water
- Wetted parts in nickel plated brass



PRODUCT DESCRIPTION

Model NOK is a flow indicator with a reed switch, that can be used to advantage in applications where oil or coloured media occur. It has a rotatable scale that never comes into contact with the media, resulting in simple reading.



SPECIAL VERSIONS

- Without Switch
- IP-class IP67
- Stainless steel for aggressive media




SPECIFICATIONS

| | |
|-------------------------------|---------------------|
| Contact Rating Max | 15 VA |
| Flow Max l/min Double | 15 l/min |
| Flow Range Max | 15 l/min |
| Flow Range Min | 3 l/min |
| IP Class | IP65 |
| Material Bolt | Nickel-plated brass |
| Material Indication Call | PVDF |
| Material of body | Nickel-plated brass |
| Material of seals | NBR |
| Material Scale | Acrylic |
| Materials Spring | Stainless steel 301 |
| Pressure Range Max | 50 bar |
| Temperature range of media to | 90 °C |
| Type of flow component | Flow Switches |

| | |
|----------------|--------|
| Weight | 1.3 kg |
| Viscosity | 1 cSt |
| Voltage AC max | 250 V |

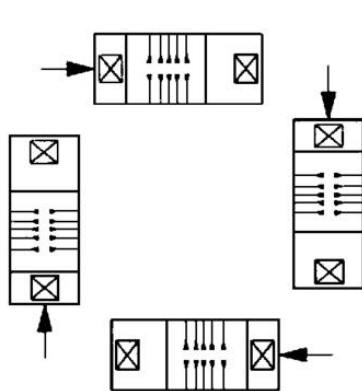

| G" | X mm | Weight kg |
|-----|------|-----------|
| 1/4 | 13 | 1,25 |
| 3/8 | 13 | 1,20 |
| 1/2 | 15 | 1,20 |
| 3/4 | 18 | 1,10 |
| 1 | 18 | 1,00 |

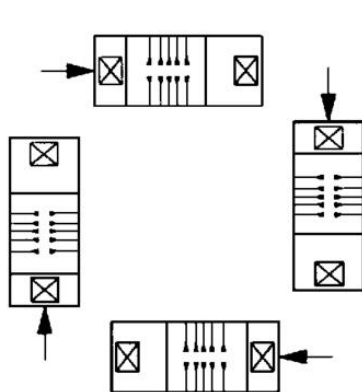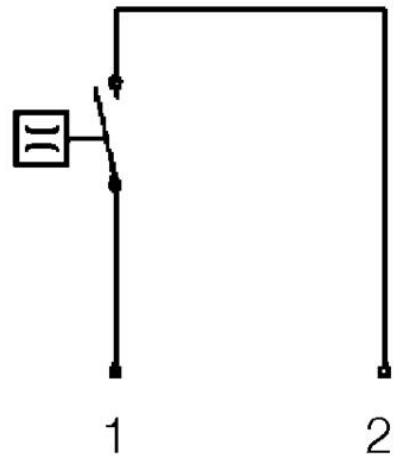

| G" | X mm | Weight kg |
|-----|------|-----------|
| 1/4 | 13 | 1,25 |
| 3/8 | 13 | 1,20 |
| 1/2 | 15 | 1,20 |
| 3/4 | 18 | 1,10 |
| 1 | 18 | 1,00 |

