

FLOW INDICATOR WITH TURNABLE SCALE

NOK-010GM015

Flow meter w. switch 3/8", 3-15 l/min

- For liquids and gases up to 50 bar pressure
- Flow from 3 to 60 l/min. water
- Wetted parts in nickel plated brass



PRODUCT DESCRIPTION

Model NOK is a flow indicator with a reed switch, that can be used to advantage in applications where oil or coloured media occur. It has a rotatable scale that never comes into contact with the media, resulting in simple reading.



SPECIAL VERSIONS

- Without Switch
- IP-class IP67
- Stainless steel for aggressive media




SPECIFICATIONS

Contact Rating Max	15 VA
Flow Max l/min Double	15 l/min
Flow Range Max	15 l/min
Flow Range Min	3 l/min
IP Class	IP65
Material Bolt	Nickel-plated brass
Material Indication Call	PVDF
Material of body	Nickel-plated brass
Material of seals	NBR
Material Scale	Acrylic
Materials Spring	Stainless steel 301
Pressure Range Max	50 bar
Temperature range of media to	90 °C
Type of flow component	Flow Switches

Weight	1.25 kg
Viscosity	1 cSt
Voltage AC max	250 V

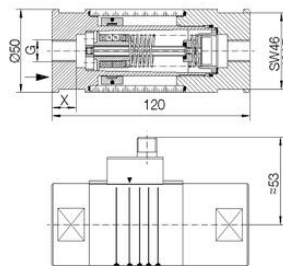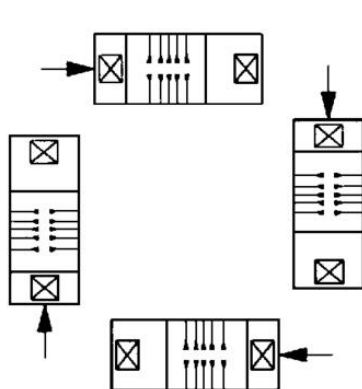

G"	X mm	Weight kg
1/4	13	1,25
3/8	13	1,20
1/2	15	1,20
3/4	18	1,10
1	18	1,00

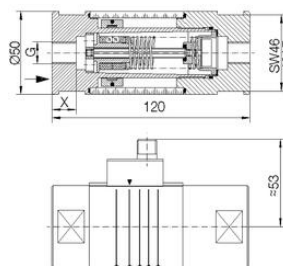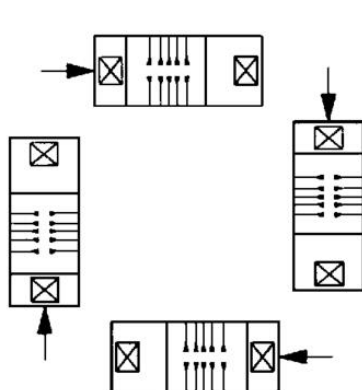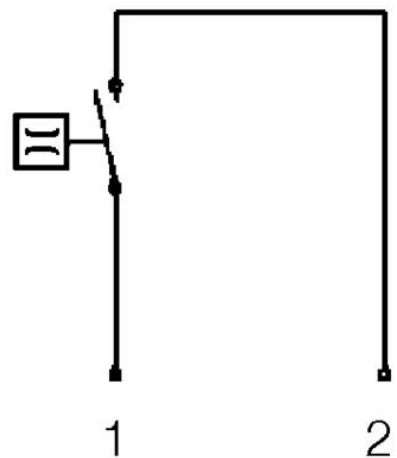

G"	X mm	Weight kg
1/4	13	1,25
3/8	13	1,20
1/2	15	1,20
3/4	18	1,10
1	18	1,00

