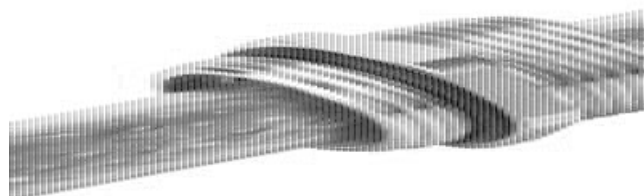


**EMC CABLE GLANDS WITH
CONTACTING SPRING, METRIC**

50.650M/EMVD

Cable gland, EMC, contacting spring, M50, brass

**PRODUCT DESCRIPTION**

- For cables with shielding
- Quick and easy EMV connection of the cable shield via the contacting spring with the gland body and the housing potential
- Integrated anchorage
- Wide sealing and clamping range

SPECIFICATIONS

Approvals	CSA, UL
Cable Diameter Max	35 mm
Cable Diameter Min	24 mm
Hexagon	55 mm
IP Class	IP68
Length Overall	49.5 mm
Material screw	Nickel-plated brass
O-ring	Yes
Pack Size	5
Packing Materials	CR/NBR
Temperature range dynamic max.	100 °C
Temperature range dynamic min.	-20 °C
Temperature range static short term min.	-40 °C
Thread Length	9 mm
Thread size	M50x1,5
Thread type	Metric

