


EMC CABLE GLANDS WITH CONTACTING SPRING, METRIC

50.663M/EMVD

Cable gland, EMC, contacting spring, M63, brass

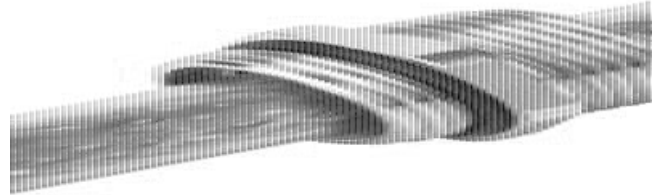

PRODUCT DESCRIPTION

- For cables with shielding
- Quick and easy EMV connection of the cable shield via the contacting spring with the gland body and the housing potential
- Integrated anchorage
- Wide sealing and clamping range

SPECIFICATIONS

Approvals	CSA, UL
Cable Diameter Max	42 mm
Cable Diameter Min	32 mm
Hexagon	65 mm
IP Class	IP68
Length Overall	52.5 mm
Material screw	Nickel-plated brass
O-ring	Yes
Pack Size	5
Packing Materials	CR/NBR
Temperature range dynamic max.	100 °C
Temperature range dynamic min.	-20 °C
Temperature range static short term min.	-40 °C
Thread Length	10 mm
Thread size	M63x1,5
Thread type	Metric

