

## BASLER DART USB3.0 CAMERAS

Extremely Small USB Camera

DAA1280-54UM/CS  
CAM USB3 M 1280\*960 54F BAS CS-MOUNT

- 1.2 - 8.3 Megapixel
- S-, CS-mount or board level
- Small, Flexible and Lightweight
- USB3.0 Vision Compatible
- S-, CS-mount or board level



### PRODUCT DESCRIPTION

The Basler Dart USB range of camera models are available in 3 variants, bare board, S-Mount and CS-Mount, this flexible mounting concept allows for a variety of lenses to be used. The series has the smallest footprint in single board cameras of only 27 x 27mm, S- and CS-Mount only increases the size by 2mm, meaning it is 29 x 29mm.

The Dart camera can be easily integrated into a vision system due to its small size and weight, additionally the USB3.0 interface provides plug & play functionality, secure data transfer and simple integration.

Basler dart board level cameras combine modern USB 3.0 camera technology, a highly cost-optimized design and Basler's proven quality and reliability. They are among the few board level cameras at present that comply with the USB3 Vision Standard.


Basler have extended the Dart portfolio to include new models with Sony IMX392 and IMX334, these powerful sensors and integrated PGI features ensures high quality images. Both sensor models are available as bare board, S-Mount and CS-Mount.

### SPECIFICATIONS

<b>Sensor model</b>	ARO134
<b>Resolution</b>	1.2MP
<b>Resolution Max</b>	1280 x 960 px
<b>Frame Rate Max</b>	54 fps
<b>Mono/Color</b>	Mono
<b>Shutter type</b>	Global
<b>Pixel size</b>	3.75 x 3.75
<b>Sensor size</b>	1/3"
<b>Digital Outputs</b>	2
<b>Digital Inputs</b>	1
<b>Approvals</b>	CE, GenICam, RoHS, UL, USB3 Vision, FCC, EAC
<b>Sensor supplier</b>	ON Semiconductor

Sensor type	CMOS
Lens Barrel	CS-mount
Weight	15 g
Length	19.2 mm
Width	29.3 mm
Height	29 mm
Power Consumption	1.2 W
Operating temperature	0°C ... 50°C

Dimensions (in mm)

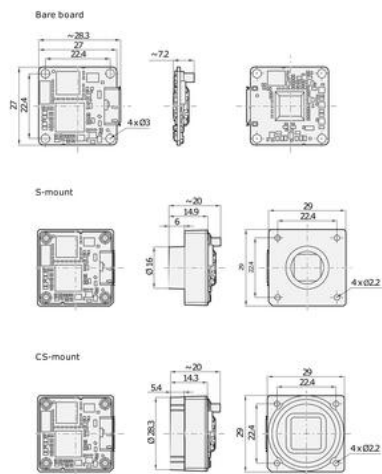

Dimensions (in mm)

