

MASS FLOW CONTROLLER GF40

GF40

Thermal Mass Flow Controller GF40

- For all gases up to 10bar
- Elastomer sealed
- Service port aids device installation, monitoring and troubleshooting



PRODUCT DESCRIPTION

Multiple gases in one device equals maximum process flexibility and productivity. The GF40 Series elastomer sealed mass flow controllers and meters with Brooks Instrument's exclusive MultiFlo™ technology provide the perfect choice for systems, processes and facilities that use a variety of gases, change gas types frequently or need to re-range while preserving gas measurement and control accuracy. It enables a new level of process flexibility combined with unprecedented flow measurement and control performance.

Features:


- Programmable multi-gas/multi-range capabilities
- Brooks® MultiFlo™ gas database contains thousands of native gas runs to establish correction functions
- Sub-1 second flow response time and accuracy of 1% set point for demanding applications
- Well suited for a variety of gases
- Fast response, Hastelloy sensor
- Easily accessible diagnostic service port is independent of tool communication
- Multi-protocol communication options include DeviceNet™, EtherCAT®, Profibus® and RS-485 analog interface

SPECIFICATIONS

Approvals	CE, EN61010-1, EN61326: 2006 (FCC Part 15 & Canada IC-subset of CE testing), RoHS
Burst Pressure	275 bar
Control range	2-100 %
Data	RS485 (HART), DeviceNet, Profibus, EtherCat
Diagnostics / Service Port	Diagnostic/Service Port: RS485 via 2.5 mm jack
Differential Pressure	3-860 ml/min = 0,5-3 bar, 861-7200 ml/min = 1-3bar, 7201-55000 ml/min = 1,7-3bar
Differential Pressure Max	3 bar

Differential Pressure Min	0.5 bar
External Leakage	1x10 ⁻⁹ atm. cc/sec He
Lowest flow	0,003-50 l/min N ₂
Material of seals	Buna, EPDM, Kalrez, Neoprene, Viton
Materials Wetted Parts	Hastelloy, Stainless steel 17-7 PH, Stainless steel 316, Stainless steel 430
Op.	10 bar
Pressure Range Max	10 bar
Response time	< 1 s
Surface Finish	32 µm Ra
Temperature range from	5 °C
Temperature range of media from	5 °C
Temperature range of media to	50 °C
Temperature range to	50 °C
Valve type	NC/NO

Base I/O Options

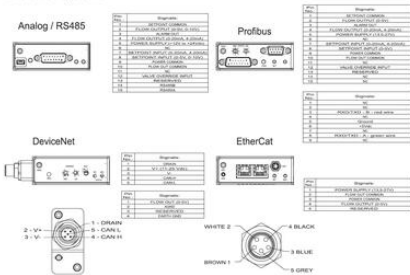

Base I/O Options

