
CONTACLIP

DIRECT MOUNT SCREW TERMINALS

BKA, RD-D

1320.2
BKA 2.5/1 Beige, 2.5mm² Direct mountable compact

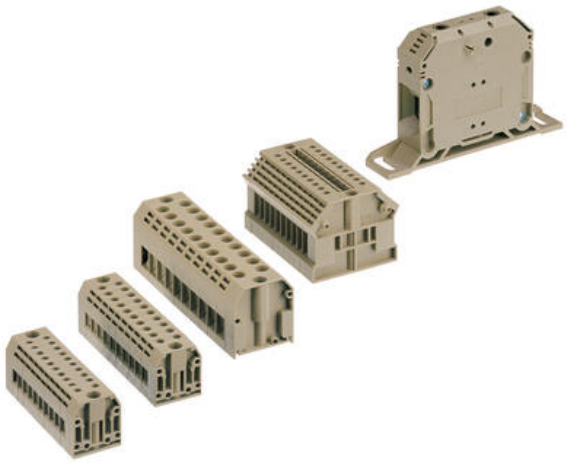

- Compact 2.5mm -10mm² versions snap together
- Pre-labeled versions
- RK-D 50mm -240mm² Direct mount
- External cross connectors

PRODUCT DESCRIPTION

SPECIFICATIONS

Cross-Section	2.5 mm²
Color	Beige
Rated Voltage IEC	400 V
Rated Current IEC	24 A
Mounting	Direct mount
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, cUL, KEMA KUR, EAC

Length	22 mm
Width	5 mm
Height	23 mm

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross section single wire from	0.2 mm²
Cross section single wire to	4 mm²

Cross section stranded wire from	0.2 mm²
Cross section stranded wire to	4 mm²
Cross section stranded with ferrule from	0.2 mm²
Cross section stranded with ferrule to	2.5 mm²
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Stripping Length	7 mm
Screw size	M 2,5
Screw type	Slotted
Torque Min	0.4
Torque max	0.8

Insulation Material	Polyamide 6.6
Flamklass	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C

Rated Voltage To UL	300 V
Rated Current To UL	20 A
UL test standard	UL 1059
Rated voltage cUL	300 V
Rated current cUL	20 A
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

Tariff code	85369010
Country of origin	DE
Weight	3.4 g
Pack Size	100

