


DIRECT MOUNT SCREW TERMINALS

BAK, RD-D

1322.2

BAK 2.5/3 Beige, 2.5mm², 3-pole Direct mount compact

- Compact 2.5mm -10mm² versions snap together
- Pre-labeled versions
- RK-D 50mm -240mm² Direct mount
- External cross connectors

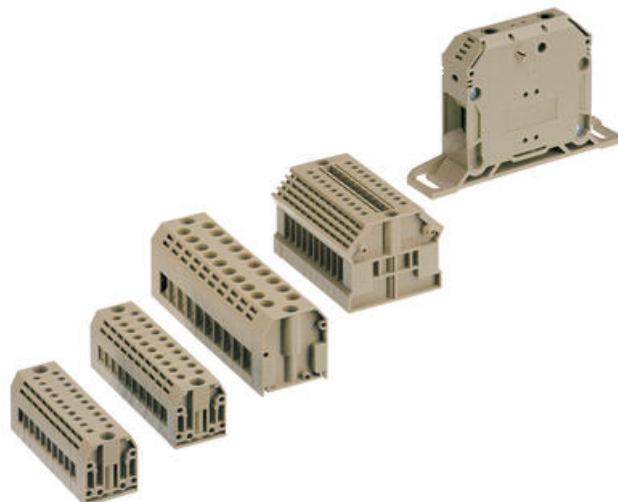

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, cUL, KEMA KUR, EAC
Color	Beige
Connections	6
Contamination degree	3
Country of origin	DE
Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	2.5 mm ²
cUL test standard	C22.2 No 158
Distance to hole centres	22.5 mm
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V2
Height	23 mm
Insulation Material	Polyamide 6.6

KEMA KEUR test standard	EN 60947-7-1:2009
Length	29.6 mm
Mounting	Direct mount
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	105 °C
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated current cUL	20 A
Rated Current IEC	24 A
Rated Current To UL	20 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Rated voltage cUL	300 V
Rated Voltage IEC	400 V
Rated Voltage To UL	300 V
Screw size	M 2,5
Screw type	Slotted
Stripping Length	7 mm
Tariff code	85369010
Torque max	0.8
Torque Min	0.4
UL test standard	UL 1059
Weight	14.4 g

