


KDS SEAL INSERTS

KDS-DE, KDE-DEG, KDS-DES, KDE-DE-FB

28982.6

KDS-DE-Z2K 4.8-6.2, Hi Strain Relief insert, 4.8mm to 6.2mmø

- 1.5mm to 35mm, cable diameters
- Patented 'Wave Cut' technology
- Flat cable versions for KDS-FB
- -40°C to 120°C
- IP66 - UL 94-V0 - Grey, UL 94HB- Black

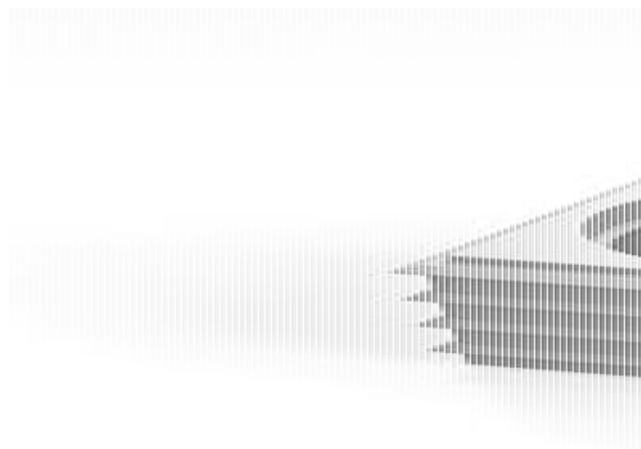

PRODUCT DESCRIPTION

Conta-Clip offer a wide range of IP66 seals to suit all applications and cable sizes.

The seals are rated to IP66, NEMA12 & NEMA 4X and are ECOLAB® certified, they are available in the standard grey colour or black.

The black seals have an operating temperature from -40°C to 120°C, are UV-stabilised and have a high chemical resistance. These are available in the small & large square profile seals only.

Single hole inserts can accommodate cables diameters from 1.5mm up to 35mm and there is a selection of 2, 3 and 4 hole variants for cable diameters of 4.5mm to 8mm diameter.

The introduction of the compact KDS-FB frame now offers a wide range of rectangular inserts designed for flat cables commonly used in the elevator and lifting industry. These can be combined with the small KDS-DE inserts to provide a round & flat cable entry system.

Cone shape and seals for AS interface cables complete the range.

SPECIFICATIONS

Approvals	cUL, UL
Cable Diameter Max	6.2 mm
Cable Diameter Min	4.8 mm
Color	Grey
Country of origin	DE
Dynamic Strain Relief	10 N
Flamklass	V-0

Glass-fibre reinforced	Yes
Halogen free	Yes
Height	25 mm
IP Class	IP66
Length	20.3 mm
Mounting	Push in
Number of cables	1
Operating temperature from	-40 °C
Operating temperature to	90 °C
Pack Size	10
Silicone-free	Yes
Static Strain Relief	30 N
Tariff code	39259020
UV-resistant	No
Weight	6.8 g
Width	20.3 mm

