

DATALOGIC - SAFE PHOTO CAMERA S5 / SL5

S5-5-G8-62-SG-ST4
Safety photocell, transmitter, 0-8m




- Range up to 40 m
- Type 4, SIL3, PL e
- Working temperature down to -25 °C

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	CE
Conforming To	EMC, LVD, MD
IP Class	IP67
Material of body	PBT, PMMA
Output	PNP
Reaction time	1 ms
Scope	0-8 m
Sensing distance	8 m
Supply voltage	24 V DC
Temperature range bearing, from	-25 °C
Temperature range bearing, to	70 °C
Temperature range from	-25 °C
Temperature range to	55 °C
Type of light	IR LED
Voltage Tolerance	±15 %

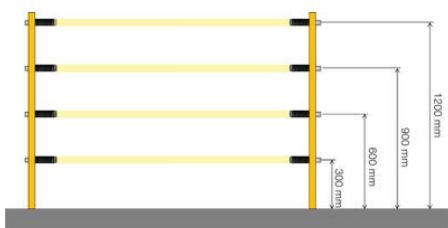

S5-5-G8-62-SG-ST4

