

DATALOGIC - PROTECTIVE HOUSING SG-IP69K

SG-IP69K-1350
IP69K tube for SG4 1350mm

- IP69K protective housing
- Available for heights 150–1800 mm
- Installation by user



PRODUCT DESCRIPTION


Datalogic SG-IP69K protective housing is a PMMA acrylic tube to protect and seal light curtains of SG2-B, SG2-E, SG4-B and SG BODY COMPACT series. Thanks to SG-IP69K accessory the IP protection of the light curtain is increased from IP65 to IP67, IP68 and IP69K.


The Gore-Tex membrane on the caps prevents water or dirt entering as well as internal condensation. The connection cable for the light curtain is protected and kept in its place by a M16 metric chock that prevents the entry of water or dirt.

The SG-IP69K accessory is particularly suitable where high levels of humidity and temperature are present and machines or equipments are frequently washed with hot water (up to 80°C) at high pressure (up to 100 bars) and/or cleaned with detergents.



SG-IP69K is particularly suitable for FOOD industry applications:

- beverage production
- meat slaughter
- sausage production
- milk/cheese industry

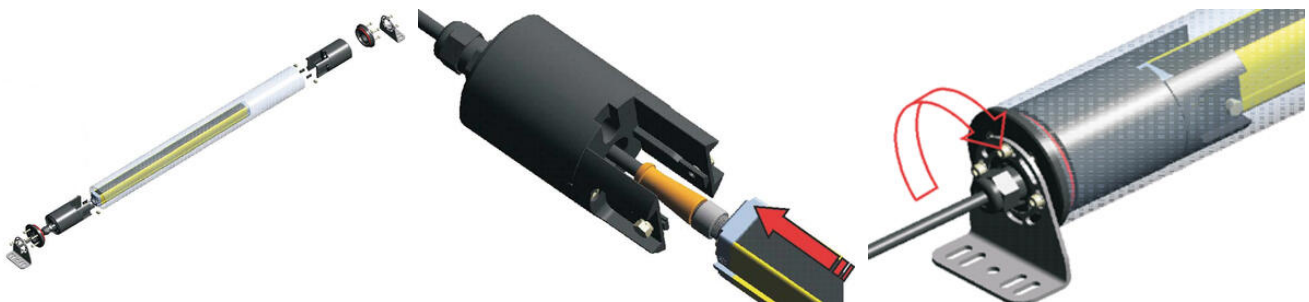



| MODEL | L (mm) |
|-----------------|--------|
| SS-IPW-N 100 | 275.5 |
| SS-IPW-N 300 | 535.7 |
| SS-IPW-N 450 | 675.8 |
| SS-IPW-N 600 | 820.7 |
| SS-IPW-N 750 | 975.5 |
| SS-IPW-N 900 | 1130.7 |
| SS-IPW-N 1050 | 1270.7 |
| SS-IPW-N 1200 | 1420.8 |
| SS-IPW-N 1350 | 1570.7 |
| SS-IPW-N 1500 | 1720.8 |
| SS-IPW-N 1650 | 1870.8 |
| SS-IPW-N 1800 | 2020.8 |
| SS-IPW-N 2-090 | 915 |
| SS-IPW-N 2-1000 | 1115 |
| SS-IPW-N 4-090 | 1213.5 |
| SS-IPW-N 4-120 | 1613.5 |

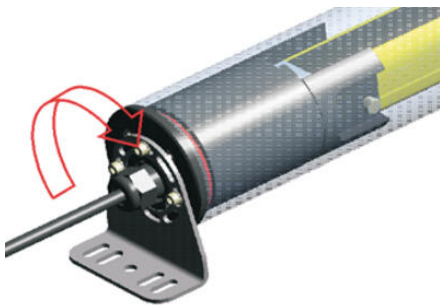

| MODEL | L (mm) |
|-----------------|--------|
| SS-IPW-N 100 | 275.5 |
| SS-IPW-N 300 | 535.7 |
| SS-IPW-N 450 | 675.8 |
| SS-IPW-N 600 | 820.7 |
| SS-IPW-N 750 | 975.5 |
| SS-IPW-N 900 | 1130.7 |
| SS-IPW-N 1050 | 1270.7 |
| SS-IPW-N 1200 | 1420.8 |
| SS-IPW-N 1350 | 1570.7 |
| SS-IPW-N 1500 | 1720.8 |
| SS-IPW-N 1650 | 1870.8 |
| SS-IPW-N 1800 | 2020.8 |
| SS-IPW-N 2-090 | 915 |
| SS-IPW-N 2-1000 | 1115 |
| SS-IPW-N 4-090 | 1213.5 |
| SS-IPW-N 4-120 | 1613.5 |