


## ADVANCED ILLUMINATION - DL2230 - GENERAL PURPOSE DIFFUSE LIGHT

## General Purpose

SERIE-DL2230  
DL2230 diffuse light


- A modified, extremely efficient integrating light source
- Compact, space saving design - ideally suited for inspecting small, specular objects
- Wide range of wavelengths

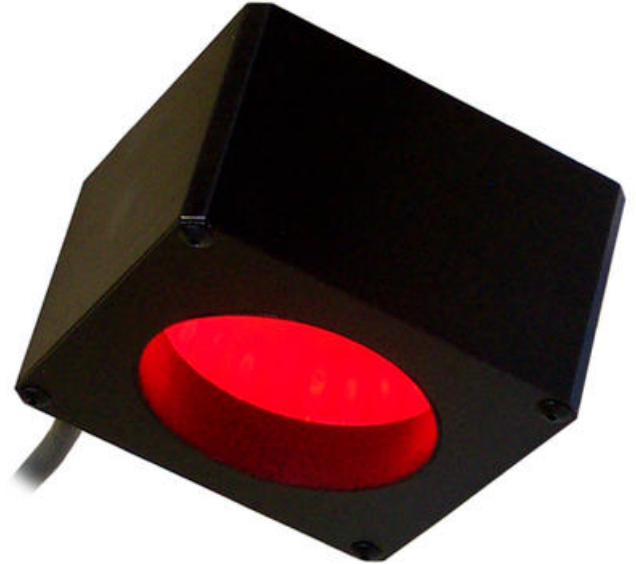

## PRODUCT DESCRIPTION

## SPECIFICATIONS

|                        |                              |
|------------------------|------------------------------|
| Approvals              | CE, RoHS                     |
| Feed                   | C1, C5, IC, I3, I3S, 24      |
| Life Span              | 50000 h                      |
| Temperature range from | 0 °C                         |
| Temperature range to   | 60 °C                        |
| Wave-Length            | WHI, 395, 470, 520, 625, 880 |

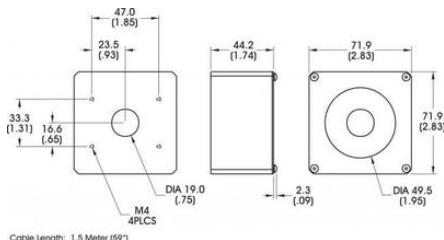

Cable Length: 1.5 Meter (59")