

## LKI-M/LKI-P PLASTIC CONNECTOR

5020.014.016

LKI-M AD14 M20 connector grey

- Metric or PG thread
- One-part
- IP54 rated




### PRODUCT DESCRIPTION

LKI-M/LKI-P plastic connectors are suitable for use with AIRFLEX -series conduits. Also available in smaller quantities than listed below.

### SPECIFICATIONS


|                        |                                       |
|------------------------|---------------------------------------|
| Diameter               | 14 mm                                 |
| Thread                 | M16x1,5 met. EN 60423                 |
| Pack Size              | 50                                    |
| IP Class               | IP54                                  |
| Approvals              | CSA 22.2, cRUus                       |
| Temperature range from | -10 °C                                |
| Temperature range to   | 110 °C                                |
| Weight kg / 100 ± 10%  | 0,38                                  |
| Material               | Polypropylene                         |
| Type                   | LKI-M                                 |
| Fits to                | AIRFLEX KUW-PU-AS, AIRFLEX KUW-PVZ-AS |

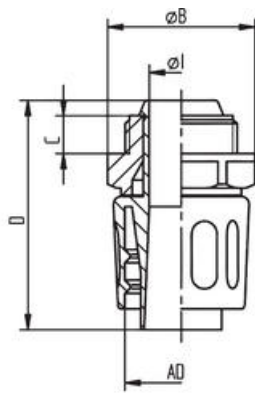

LKI-M

IP54

|              | ø  | I<br>mm | B<br>mm | C<br>mm | D<br>mm |
|--------------|----|---------|---------|---------|---------|
| 5020.014.016 | 14 | 9,5     | 21,0    | 10,0    | 39,5    |
| 5020.014.020 | 17 | 11,5    | 24,5    | 10,0    | 42,0    |
| 5020.014.025 | 21 | 14,5    | 30,0    | 11,0    | 48,0    |
| 5020.014.032 | 27 | 19,5    | 39,0    | 12,0    | 58,0    |
| 5020.014.040 | 36 | 27,0    | 50,0    | 12,0    | 59,0    |
| 5020.014.050 | 45 | 35,5    | 59,5    | 12,0    | 62,5    |
| 5020.014.063 | 56 | 46,0    | 71,5    | 15,0    | 68,0    |

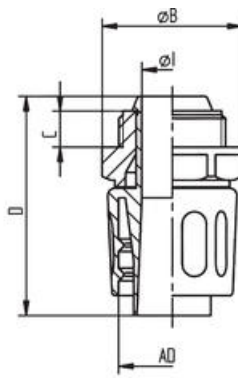

LKI-P

IP54

|              | ø  | I<br>mm | B<br>mm | C<br>mm | D<br>mm |
|--------------|----|---------|---------|---------|---------|
| 5020.010.009 | 14 | 9,5     | 21,0    | 10,0    | 39,5    |
| 5020.010.011 | 17 | 11,5    | 24,5    | 10,0    | 42,0    |
| 5020.010.013 | 19 | 13,0    | 26,5    | 10,0    | 42,0    |
| 5020.010.016 | 21 | 14,5    | 30,0    | 11,0    | 48,0    |
| 5020.010.021 | 27 | 19,5    | 39,0    | 11,0    | 58,0    |
| 5020.010.029 | 36 | 27,0    | 50,0    | 12,0    | 59,0    |
| 5020.010.036 | 45 | 35,5    | 59,5    | 12,0    | 62,5    |
| 5020.010.048 | 56 | 46,0    | 71,5    | 15,0    | 68,0    |