


## AIRFLEX®-KUW-PVC-AS PROTECTIVE PLASTIC CONDUIT

2030.101.013

AIRFLEX-KUW-PVC-AS AD17 13x17 mm grey

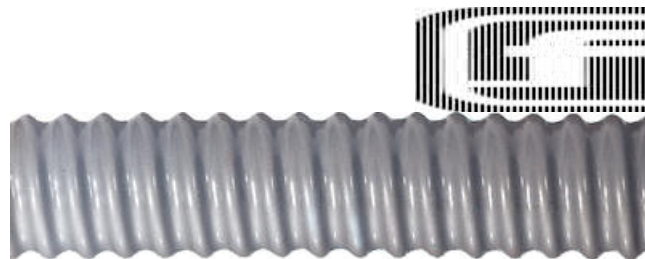

- Spring steel wire spiral, PVC sheathing
- Gas- and liquid-tight
- Very flexible
- Resistant against chemicals and oils

### PRODUCT DESCRIPTION

AIRflex-KUW-PVC-AS is a protective plastic conduit constructed of spring steel wire spiral covered with an overall PVC sheathing. Applicable for use in automation, machinery and equipment, electrical installations and shipbuilding, where liquid-tight construct and high-level of protection is required.

Available also in smaller quantities than listed below.



- Liquid-tight applications
- Energy chain and robot installations

### SPECIFICATIONS

Hose Dimension AD	17
Dimensional Inner	13 mm
Dimensional Outer	17 mm
Pack size	50 m
IP Class	IP68
Approvals	VDE
Color	Grey
Bending Radius -10% Static	13
Bending Radius -10% Dynamic	35
Temperature range from	-25 °C
Temperature range to	90 °C

<b>Weight / M</b>	0,103
<b>Material</b>	PVC coating, Steel
<b>Type</b>	AIRFLEX KUW-PVZ-AS

