

CONTACT BLOCKS

Screw terminals

33S10

CONTACT BLOCK NO SCREW REAR

- Use with 1, 3 or 5 position clips
- Finger safe IP20 terminals
- Gold plated option for low current
- Rear mount version for LBX stations



PRODUCT DESCRIPTION

Contact blocks with screw terminal connection that snap directly onto 1, 3 or 5 position clips.

A second row can be stacked directly up to 3 wide to achieve a maximum of 6 contacts.

Available in N/O, N/C or combined N/O & N/C blocks.



Optional gold plated contacts for low level switching applications.

Rear mounting contact blocks need no clip and snap directly into the base of the LBX enclosures.

SPECIFICATIONS

Approvals	UL 508, CSA 22.2, BV, CB, CE
Climate resistance cyclic damp heat	IEC 60068-2-3
Climate resistance to sea air	IEC 60068-2-52
Climate-resistant heat	IEC 60068-2-30
Connection	Screw Rear Mount
Connection solid wire max	2,5 mm ²
Connection stranded wire with ferrule max	1.5 mm ²
Connection stranded wire with ferrule min	0.5 mm ²
Contact type	1NO
Conventional free air thermal current Ith (AC15)	10 A
Conventional free air thermal current Ith (DC13)	2,5 A
Lifespan Electrical	1 million cycles @ AC15: 120 V 3 A, 240 V 1,5 A. DC13: 125 V 0,22 A, 250 V 0,1 A.

Minimum operating current I _e (24Vdc)	5 mA
Protection rating rear of panel	IP20
Rated impulse withstand voltage U _{imp} (Overvoltage cat III - Pollution 3)	6 kV
Rated insulation voltage ac (IEC 60947-1)	690 V
Rated insulation voltage ac (UL 508)	600 V
Rated operating current I _e (AC15/120V)	6 A
Rated operating current I _e (AC15/240V)	3 A
Rated operating current I _e (AC15/380V)	1,9 A
Rated operating current I _e (AC15/480V)	1,5 A
Rated operating current I _e (AC15/500V)	1,4 A
Rated operating current I _e (AC15/600V)	1,2 A
Rated operating current I _e (DC13/110V)	0,3 A
Rated operating current I _e (DC13/125V)	0,55 A
Rated operating current I _e (DC13/230V)	0,2 A
Rated operating current I _e (DC13/24V)	1,5 A
Rated operating current I _e (DC13/250V)	0,27 A
Rated operating current I _e (DC13/400V)	0,15 A
Rated operating current I _e (DC13/48V)	1 A
Rated operating current I _e (DC13/500V)	0,13 A
Rated operating current I _e (DC13/600V)	0,1 A
Rated operating current I _e (DC13/60V)	0,7 A
Temperature range bearing, from	-40 °C
Temperature range bearing, to	70 °C
Temperature range from	-25 °C
Temperature range to	70 °C
Torque max	1,2 Nm
Weight	13 g

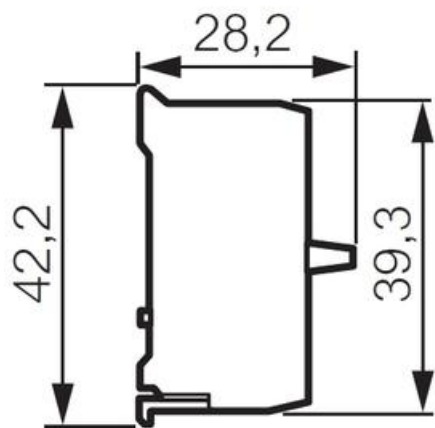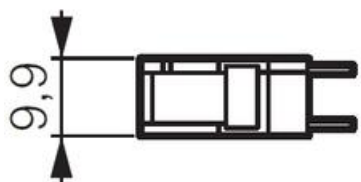

NO

