

## POWER SUPPLY 1-PHASE, 12 V DC MINILINE SERIES

ML70.100  
PULS PSU 70W 24-28VDC

- Output current of 2.5 A or 4.2 A
- High efficiency
- Space-saving
- Manages high starting/overload currents
- Spring connection



### PRODUCT DESCRIPTION


Puls series Miniline is characterised by compact dimensions, reliability and long lifetime with high efficiency, which entails low energy loss and low temperatures in the switch cabinet. The power supply units are just 45 mm wide and feature spring connection, which means faster installation. For more technical information, consult the **general information** at the beginning of the power supply section.

### SPECIFICATIONS

Input voltage range	Switch
Number of phases	1
Input voltage AC	100-120, 220-240 V
Input voltage ac min	85 V AC
Input voltage ac max	264 V AC
Input voltage DC	290 V
Input voltage dc min	220 V DC
Input voltage dc max	375 V DC
Inrush current at 120 V ac typical	26 A
Inrush current at 230 V ac typical	30 A
Power Factor at 120 V AC, full load. Typical	0,54
Power Factor at 230 V AC, full load. Typical	0,54
Supply Frequency	50-60 ±6 %

<b>Power Consumption At 120 V AC</b>	1,6 A
<b>Power Consumption At 230 V AC</b>	0,8 A
<b>Type Power Supply</b>	AC-DC
<b>Output voltage</b>	24 V DC
<b>Output voltage min</b>	24 V DC
<b>Output voltage max</b>	28 V DC
<b>Output Current</b>	3 A
<b>Effect</b>	72 W
<b>Power Reduction Of 60 To 70 ° C</b>	1,8 W/°C
<b>Ripple. max</b>	50 mV pp
<b>Temperature Range Without Derating From</b>	-10 °C
<b>Temperature Range Without Derating To</b>	60 °C
<b>Efficiency At 230 V AC, full load. Typical</b>	89 %
<b>MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C</b>	600000 h
<b>Width</b>	45 mm
<b>Height</b>	75 mm
<b>Depth</b>	91 mm
<b>Weight</b>	0,26 kg
<b>Clamp type</b>	Spring-clamp
<b>Series</b>	Miniline
<b>Approvals</b>	CB, CE, CSA, GL, NEC Class 2, UL
<b>Material Protection</b>	ABS plastic
<b>Hold-up time at 120 V AC, full load. Typical.</b>	25 ms
<b>Hold-up time at 230 V AC, full load. Typical.</b>	40 ms
<b>IP Class</b>	IP20

Output characteristic  $V_{out} / I_{out}$   
(min.)

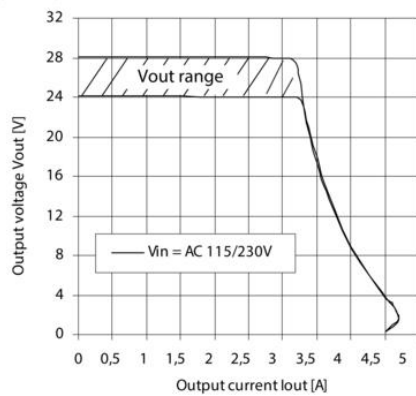

Efficiency  
(@  $V_{out} = 24.5V$ , typ.)

