

NH FUSE-LINKS NH3, GG

500 V AC, 690 V AC

NH3GG50V224

NH fuse-link NH3 gG 500 V 224 A

- Size 3
- Silver-plated copper contacts
- Ceramic body
- Breaking capacity 80/120 kA



PRODUCT DESCRIPTION



Mersen/Ferraz Shawmut gG type NH fuses are suitable for protecting cables and various appliances. Full range breaking capacity, provide protection against very high short-circuit currents.

Characteristics

- Dimensions according to DIN 43 620 Parts 1 to 4
- Isolated metal gripping slugs
- Double indicator
- Lead-free connectors
- 0% cadmium

SPECIFICATIONS

Approvals	BV, CB, CE, DNV, KEMA KEUR, Lloyd's, VDE
Breaking Capacity	120 kA
Characteristic (CVL)	gG
Indication (CVL)	Visual, Striker
Manufacturer Part No	V233744
Nominal current	224 A
Pack Size	1
Voltage AC max	500 V
Voltage DC max	250 V

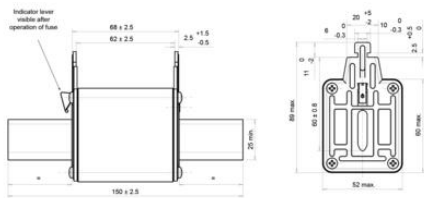

Visibility of red indicator signals conduction of the fuse link.
After operation the red indicator is no longer visible

