

DATALOGIC - VISION SENSOR DATAVS2 PRO

DATAVS2-06REPRO
VISION SENSOR 6MM LINS PRO

- 360° pattern recognition / Controls for Bar code, Datamatrix
- Memory for up to 20 different inspections
- 3 outputs
- R232 interface



PRODUCT DESCRIPTION

DataVS2 is a series of Vision sensors for flexible solutions for machine applications.

The sensor is complete with optics, red LED lighting and electronics in a compact housing. The parameters in the sensor are set via PC through Ethernet communication. The software comes with the sensor and is developed to lead the user step by step through parameter setting. DataVS2 is available in 4 different versions with different control instruments.

The PRO model - handles the functions in the Advanced and ID models.

It manages 360° pattern recognition and also bar code, datamatrix and OCV. It also has 5 new instruments: 3 locators (Bar code, Datamatrix and 360° contour matching)


2 controls: 360° contour counter, 360° defect finder




TECHNICAL DATA

Supply voltage	24 V DC $\pm 10\%$
Ripple	1Vpp max. with lighting 2Vpp without lighting
Current consumption	100 mA at 24 VDC (without lighting)
Output type	3 PNP, 100 mA max.
	RS232
Resolution	640x480 (VGA)
Network interface	M12 4-pole Ethernet 10/100 Mbps
Interface external lighting	Strobe signal (24 V PNP N.O)
Frame rate	60 fps

DIMENSIONS

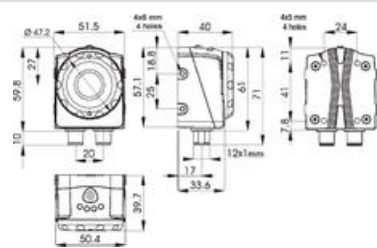

CONNECTION

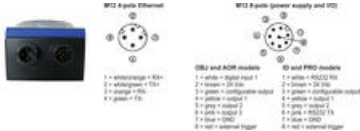

ORDER NUMBER

Order number	Description	Output
DATAVS2-06-RE-PRO	6 mm lens, PRO	3 outputs, RS232
DATAVS2-08-RE-PRO	8 mm lens, PRO	3 outputs, RS232
DATAVS2-12-RE-PRO	12 mm lens, PRO	3 outputs, RS232
DATAVS2-16-RE-PRO	16 mm lens, PRO	3 outputs, RS232
DATAVSCVRJ45D03	Ethernet cable 3m	

DOWNLOAD

Data sheet	Download
Manual	Download

SPECIFICATIONS

Electrical connection	M12 4 pole D-coded, M12 8 pole connector
Frame Rate	60
IP Class	IP50
Lens material	ABS plastic
Material Protection	Aluminium
Output	3xPNP, RS232
Output current max	0,1 A
Power consumption max	0,1 A
Resolution	640x480 (VGA)
Temperature range from	-10 °C

Temperature range to	50 °C
Voltage DC max	24 V
Voltage DC min	24 V
Voltage Tolerance	10%



- Step 1: Image Setup**
- The first step consists in connecting the sensor and configuring the image quality parameters. When the desired results are obtained, the user can memorize the image that will be used as a template during sensor functioning.
- Step 2: Teach**
- The second step establishes the acceptance criteria to distinguish objects from wastes. One or more controls can be selected according to the task to carry out.
- Step 3: Run**
- The third step configures the sensor digital outputs, simulates sensor functioning on the PC to verify the controls chosen and activates the operating phase on the sensor using the PC only to control the diagnostics.

The professional model includes in the same software all the functionalities already available on Advanced and Identification versions. Moreover it features 5 new software tools: 3 locators and 2 controls.

Locators	Functioning
Barcode	Finds a barcode in the Region Of Interest and re-locates all the other inspection controls accordingly.
Datamatrix	Finds a datamatrix code in the Region Of Interest and re-locates all the other inspection controls accordingly.
360° Contour Match	Finds a reference template in the Region Of Interest and re-locates all the other inspection controls accordingly.
Controls	Functioning
360° Contour Counter	Counts how many times a reference contour is present in the Region Of Interest.
360° Defect Finder	Detects even smallest defects on a part.

