


MOLEX - I / O CENTRAL M8 WITH EMBEDDED CABLE

BEB401P-FBW-05

M8 MPIS BLACK BOX 4PORT 5m WSOR

- Incorporated cable
- WSOR (Weld Slag Oil Resistant) cable
- LED indication for voltage and active port
- IP67

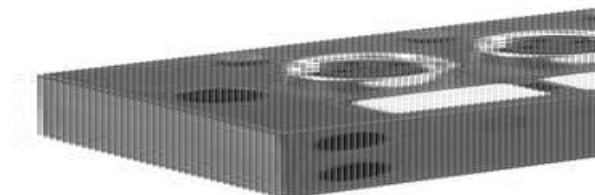

PRODUCT DESCRIPTION

SPECIFICATIONS

Cable length	5 m
Number of poles	3
Material Cable	TPU (WSOR)
Connection Thread	M8
Material of connection	Brass
Drag Chain Tested	Yes
IP Class	IP67
LED indicator	Yes
Cable diameter	7,2 +/-0,25 mm
Temperature Range For Use In Chain	60 °C
Temperature Range The Use Of Chain	-5 °C
Temperature Range The Use Of	90 °C
Temperature Range The Use Of	-40 °C
Temperature Range For Flexible Use	80 °C
Temperature Range Flexible Use Of	-25 °C
Color Cable	Black
Temperature range to	85 °C
Power / Port Max	2 A
Temperature range from	-25 °C

Supply Voltage DC Max	30 V DC
Central Material	PBT
Number Of Ports	4
Supply Voltage DC Min	10 V DC
Power / tot max	6 A

