


MOLEX - I / O CENTRAL M12 WITH EMBEDDED CABLE

BTB400P-FBW-05

MPIS M12 PNP 4P 4PT BK 5m WSOR

- Incorporated cable
- WSOR (Weld Slag Oil Resistant) cable
- LED indication for voltage and active port
- IP67

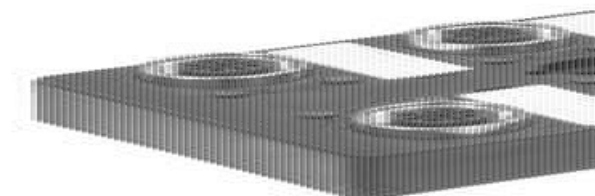

PRODUCT DESCRIPTION

SPECIFICATIONS

Cable length	5 m
Number of poles	4
Material Cable	TPU (WSOR)
Connection Thread	M12
Material of connection	Brass
Drag Chain Tested	Yes
Cross-Section	0,34 mm ²
Coding	A
IP Class	IP67
Materials Contacts	Gold plated
LED indicator	Yes
Cable diameter	7,8 mm
Temperature Range For Use In Chain	60 °C
Temperature Range The Use Of Chain	-5 °C
Temperature Range The Use Of	90 °C
Temperature Range The Use Of	-40 °C
Temperature Range For Flexible Use	80 °C
Temperature Range Flexible Use Of	-25 °C
Color Cable	Black

Supply Voltage DC Max	30 V DC
Central Material	PBT
Number Of Ports	4
Supply Voltage DC Min	10 V DC
Color House	Black

