


## SAFETY SWITCH ENK / VTU

601.6669.133

TONGUE SWITCH ENK-A2Z VTU

- Robust plastic body
- Actuator position in 45° steps
- UL and CSA approvals
- Also available with adjustable VTU actuator

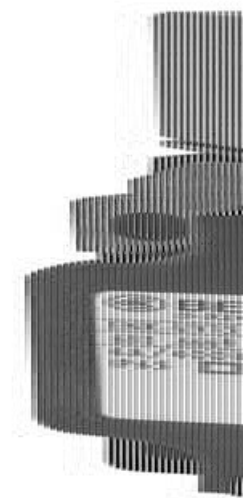

### PRODUCT DESCRIPTION

Bernstein ENK...VTU safety switches are an ideal choice for door and hatch applications without the need for electronic locking. Specifically made for demanding environments. Body made of glass fibre reinforced thermoplastic which offers durability and long service life.

The actuating device is preferably started from 2 sides. By loosening the 4 screws the actuation assembly can be rotated in 90 degree increments such that 8 actuation directions are possible. The actuation assembly is to be again fastened to the housing using the 4 screws.

Selection offers various contact options, out of which NC safety contact is always force guided. Delivery includes a default actuator, adjustable actuator sold separately.

### SPECIFICATIONS

|                        |         |
|------------------------|---------|
| Cable entry            | M20x1,5 |
| Contact type           | 2 NC    |
| Hold The Power Key     | 20 N    |
| IP Class               | IP65    |
| Temperature range from | -30 °C  |
| Temperature range to   | 80 °C   |

