


MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1015.2

RK1.5-4 Beige, 4mm² Compact feed through, multi-foot

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm² cables
- cross connectable
- Polyimide 6.6-V2

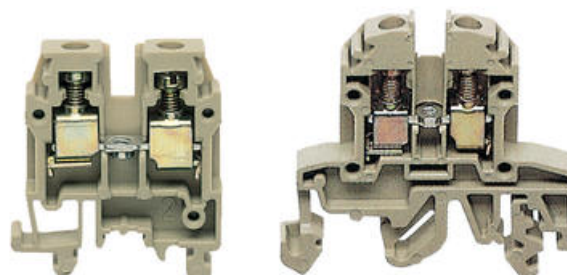

PRODUCT DESCRIPTION

This mixed range of compact terminals is ideal for applications where space is at a premium.

The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail.

Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

SPECIFICATIONS

Approvals	UL, CSA, GL, KEMA KUR, EAC
Color	Beige
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0,2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	4 mm ²
Cross-Section	4 mm ²
CSA test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

Flamklass	UL94-V2
GL test standard	IEC 60947-7-1:2002
Height TS 32	48 mm
Height TS 35/7.5	43,5 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	45 mm
Mounting	TS 35/7,5 and TS 32
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	105 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A4
Rated Current CSA	40 A
Rated Current IEC	32 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	10
Rated Voltage IEC	500 V
Screw size	M 3
Screw type	Slotted
Stripping Length	9 mm
Tariff code	85369010
Torque max	1 Nm
Torque Min	0,5 Nm
UL test standard	UL 1059
Weight	7,29 g
Width	6 mm
Voltage CSA	300 V

