


FUSE TERMINALS - ZTRK 2.5MM², OT/ZS

ZTRK/OT, ZTRK/ZS

3635.2
ZS/H0/ZTR

- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0
- Current limited by an automotive fuse 10 A

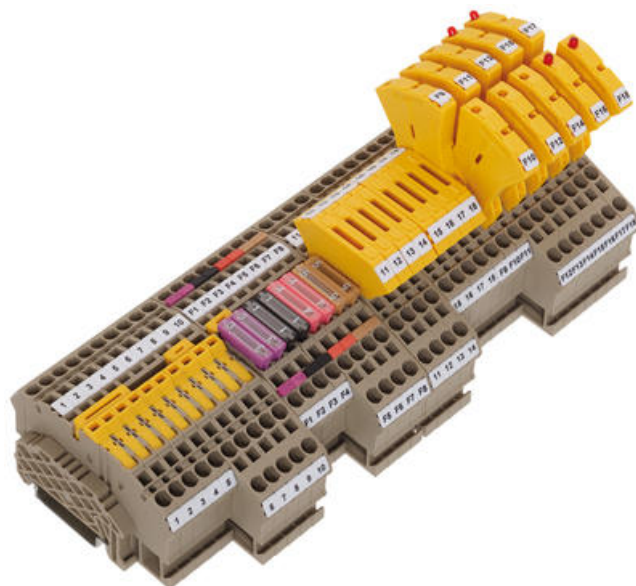

PRODUCT DESCRIPTION

SPECIFICATIONS

Additional information	without status display
Approvals	CSA, CSA US
Color	Yellow
Contamination degree	3
Country of origin	DE
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
Flamklass	UL94-V0
Fuse size	5 x 20 mm
Insulation Material	Polyamide 6.6
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	20
Rated Current CSA	10 A
Rated current CSAus	10 A
Rated impulse voltage	4 kV

Rated voltage CSAus	300 V
Tariff code	85369010
Weight	6,55 g
Voltage CSA	300 V