


EARTH TERMINALS - FSL 1.5-16MM²

FSL

3203.2

FSL 1,5/2A GNYE

- Wiring without tools
- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

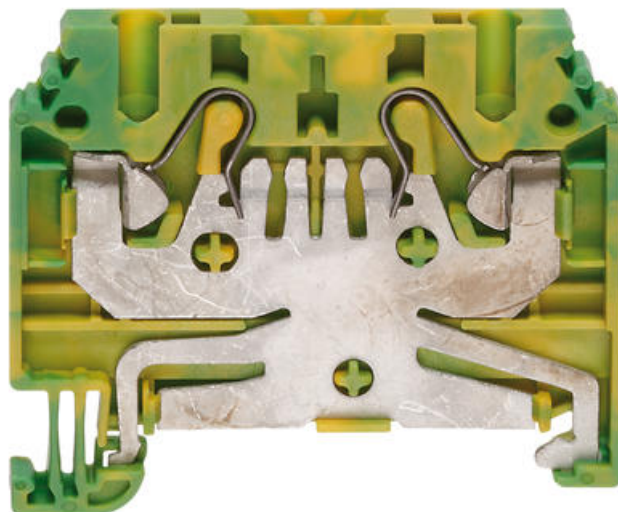

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	CSA, CSA US, KEMA KUR, EAC
Color	Green/yellow
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	2
Cross section single wire from	0,2 mm ²
Cross section single wire to	1,5 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded wire to	1,5 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	1,5 mm ²
Cross-Section	1,5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	43 mm

Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-2:2009
Length	48,5 mm
Mounting	TS 35/7,5
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A1
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	16
Stripping Length	12 mm
Tariff code	85369010
Weight	8,1 g
Width	4,1 mm

