



LIQUID-TIGHT-EF PROTECTIVE METAL CONDUIT

2080.111.026

LIQUID-TIGHT-EF AD1" grey



- Conduit made from galvanized steel, PVC sheathing
- Liquid-tight
- Resistant against chemicals and oils
- Flame-resistant
- IP68 rated

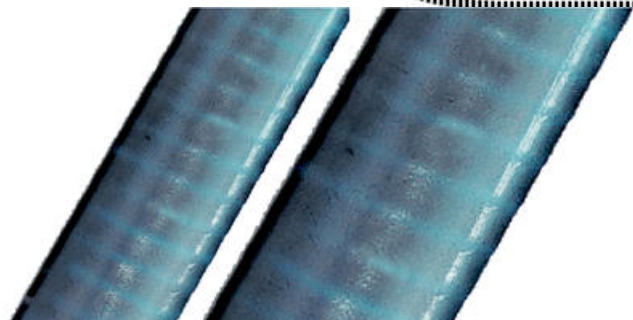

PRODUCT DESCRIPTION

LIQUID-TIGHT-EF is a protective metal conduit made from galvanized steel, covered with a PVC sheathing. Suitable for use in various applications where liquid-tight construct is required. IP68 rated.

Examples of use include electrical installations in automation, machinery and equipment and automotive industry.

Profile



SPECIFICATIONS

Diameter	1"
Dimensional Inner	26,5 mm
Dimensional Outer	33 mm
Pack size	25 m
Approvals	VDE
Color	Grey
Bending Radius -10% Static	195
Bending Radius -10% Dynamic	490
Temperature range from	-25 °C

Temperature range to	90 °C
----------------------	-------

Weight / M	0,7
------------	-----

