



## LIQUID-TIGHT-EF PROTECTIVE METAL CONDUIT

2080.111.050

LIQUID-TIGHT-EF AD2" grey



- Conduit made from galvanized steel, PVC sheathing
- Liquid-tight
- Resistant against chemicals and oils
- Flame-resistant
- IP68 rated

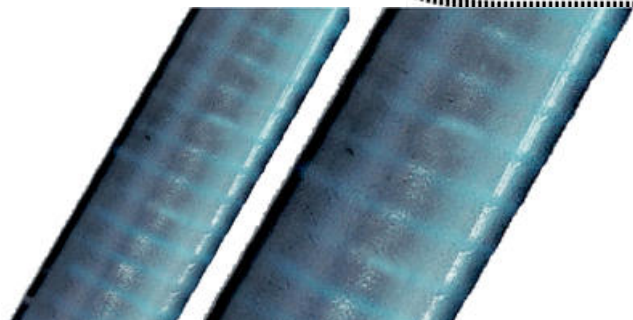


### PRODUCT DESCRIPTION

LIQUID-TIGHT-EF is a protective metal conduit made from galvanized steel, covered with a PVC sheathing. Suitable for use in various applications where liquid-tight construct is required. IP68 rated.

Examples of use include electrical installations in automation, machinery and equipment and automotive industry.

#### Profile

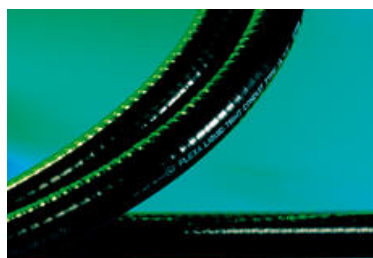

## SPECIFICATIONS

Diameter	2"
Dimensional Inner	51,5 mm
Dimensional Outer	60 mm
Pack size	25 m
Approvals	VDE
Color	Grey
Bending Radius -10% Static	320
Bending Radius -10% Dynamic	780
Temperature range from	-25 °C

Temperature range to

90 °C

Weight / M

1,2

