


3-WIRE INSTALLATION TERMINALS - FDLI

FDLI

3283.2

FDLI 2,5-4 NT/L/PE

- Only 5.1mm wide
- Base terminal with wide range of options
- Snap on Earth on both sides
- Disconnect and fuse options

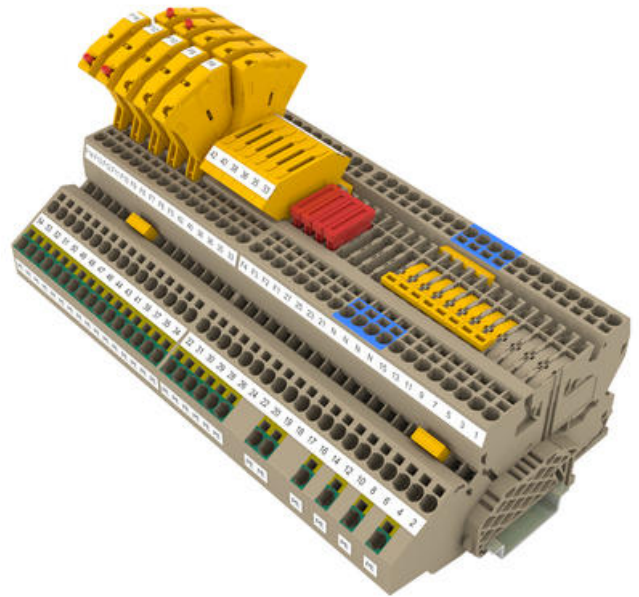

PRODUCT DESCRIPTION

The base terminals of the FDLI 2.5-4 series are available in eight different versions. This range offers you the best all round solution, whether you are using our feed-through terminals, feedthrough terminals with disconnect-blade or the empty terminal versions together with custom-fit accessories.

All can be combined together in one neat package with a uniform size to give a professional and easy to wire solution

SPECIFICATIONS

Approvals	EAC
Color	Beige
Connections	5
Contamination degree	3
Country of origin	DE
Cross connect channels	2
Cross section single wire from	0,2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²

Cross-Section	4 mm ²
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	55,6 mm
Insulation Material	Polyamide 6.6
Length	101 mm
Load Current Max	32 A
Mounting	TS 35/7,5
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated Current IEC	18 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	10
Rated Voltage IEC	400 V
Stripping Length	12 mm
Tariff code	85369010
Weight	27,25 g
Width	5,1 mm