

## VARIOLINE LAMP WITH SOCKET - LED 121/122

Varioline

12110.0-00

LED 121 220-240V AC,PIR sensor,screw fixing,Germany/Russia socket



- Maintenance free LED technology
- 120° rotatable, glare free
- Integrated socket and power unit
- Screw or magnet fixing
- Ideal for larger enclosures




### PRODUCT DESCRIPTION

The Varioline LED 121/122 lamp has an integrated socket featuring many European countries as well as the US and Australia. This compact and powerful LED lamp is for use in enclosures, with a service life of 60,000 h, and emitting light more than 1,000/1,700 Lm, the LED 121/122 will illuminate even large enclosures to their full depth and height. The integrated socket allows for power connection of laptops and diagnostic devices. The glare-free, 120° rotatable light tube uses Mid-power LEDs.

### SPECIFICATIONS

Activation	IR sensor
Approvals	CE, RoHS
Approvals pending	VDE
Color	Translucent/White
Frequenze	50/60 Hz
Height	44 mm
Humidity Storage	<90% RH
IP Class	IP20
Length	500 mm
Light source	LED
Material of body	Plastic
Mounting	Screw fixing

Nominal socket current	16 A
Nominal voltage	220-240 V AC
Operating Humidity	< 90% RH
Operational Temperature	-30°C ... +40°C
Power Consumption	11 W
Protection Class	I (earthed)
Socket	DE/DK/FI/NO/RU/SE
Storage temperature	-40°C ... +85°C
Weight	0.4 kg
Width	100 mm
Voltage max	265 V ac
Voltage min	200 V ac

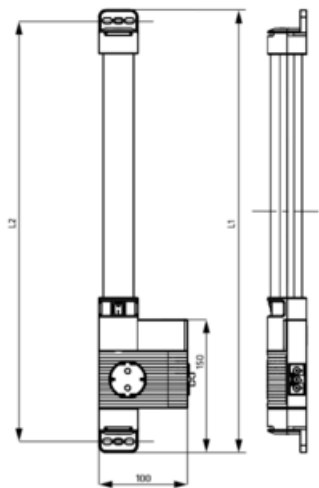

LED 121 (Size 1)


L1 = 500 mm

L2 = 475 mm

LED 122 (Size 2)

L1 = 700 mm

L2 = 675 mm

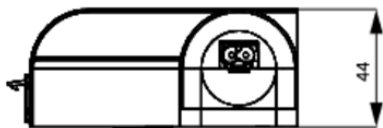

View of screw fixing

