



## VARIOLINE LAMP WITH SOCKET - LED 121/122

Varioline

12100.0-00

LED 121 220-240 V AC, on/off switch, screw fixing, Germany/Russia socket

- Maintenance free LED technology
- 120° rotatable, glare free
- Integrated socket and power unit
- Screw or magnet fixing
- Ideal for larger enclosures





### PRODUCT DESCRIPTION

The Varioline LED 121/122 lamp has an integrated socket featuring many European countries as well as the US and Australia. This compact and powerful LED lamp is for use in enclosures, with a service life of 60,000 h, and emitting light more than 1,000/1,700 Lm, the LED 121/122 will illuminate even large enclosures to their full depth and height. The integrated socket allows for power connection of laptops and diagnostic devices. The glare-free, 120° rotatable light tube uses Mid-power LEDs.


### SPECIFICATIONS

<b>Activation</b>	Switch
<b>Approvals</b>	CE, RoHS
<b>Approvals pending</b>	VDE
<b>Color</b>	Translucent/White
<b>Frequenze</b>	50/60 Hz
<b>Height</b>	44 mm
<b>Humidity Storage</b>	<90% RH
<b>IP Class</b>	IP20
<b>Length</b>	500 mm
<b>Light source</b>	LED
<b>Material of body</b>	Plastic
<b>Mounting</b>	Screw fixing
<b>Nominal socket current</b>	16 A

Nominal voltage	220-240 V AC
Operating Humidity	< 90% RH
Operational Temperature	-30°C ... +40°C
Power Consumption	11 W
Protection Class	I (earthed)
Socket	DE/DK/FI/NO/RU/SE
Storage temperature	-40°C ... +85°C
Weight	0,4 kg
Width	100 mm
Voltage max	265 V ac
Voltage min	200 V ac

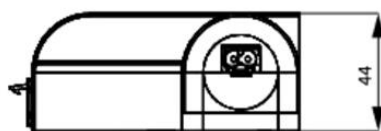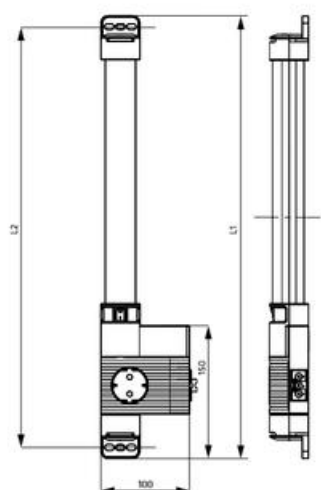

View of screw fixing

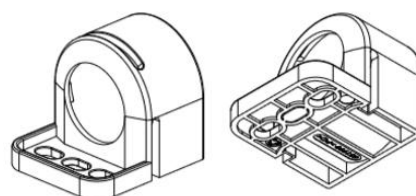

LED 121 (Size 1)  
L1 = 500 mm  
L2 = 475 mm

LED 122 (Size 2)  
L1 = 700 mm  
L2 = 675 mm

