

**ORLACO -**

ORL0506953

PTZ Camera Aluminium PAL RS232



**PRODUCT DESCRIPTION**

**SPECIFICATIONS**

<b>Image Format</b>	PAL
<b>IP Class</b>	IP69K
<b>Supply Voltage DC Max</b>	30 V DC
<b>Supply Voltage DC Min</b>	18 V DC
<b>Temperature range from</b>	-40 °C
<b>Temperature range to</b>	85 °C
<b>Vibration Resistance</b>	50G

**Electrical connections**


Cable Base, Art no 1221300

1 - Coax core	RS232	RS485
2 - Coax shielding	Video	Video
3 - Red	Camera power	Camera power
4 - Black	Camera OV	Camera OV
5 - Red/White	Pan/Tilt power	Pan/Tilt power
6 - Black/White	Pan/Tilt OV	Pan/Tilt OV
7 - Green	Serial 1 RS-232 TX	B (Inv)
8 - Gray	Serial 2 RS-232 RX	A (non-Inv)
9 - Black/Gray	Serial OV	

1 = Red/blue	N.C.
2 = Black/blue	N.C.
3 = Blue	N.C.
4 = Brown	N.C.
5 = Shielding	N.C.

Cut off at wire entry  
(In Junction box)

**Dimensions**

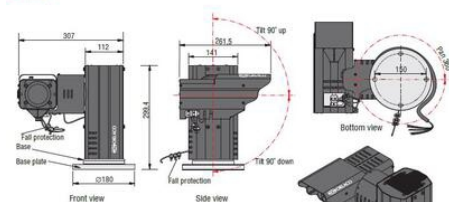

Units in mm

Cable length 5m  
3.5m available for installation  
Cable Base 98-10D-11W  
Art. no. 1221300