

POWER SUPPLY 1-PHASE, 12V DC LOW POWER PIANO SERIES

PIM60.125

PSU 100-240V ac I/P 12V dc 5A 60W O/P Screw

- Output current 5 A
- Push-in or screw terminals
- Up to 90,7% efficiency
- Low no-load power losses



PRODUCT DESCRIPTION

The latest and smallest representatives of the PIANO product family are currently the 12V DIN rail power supplies PIM60 (60W). Mini power supplies. New space opportunities.

The new PIANO Mini (PIM) power supplies create space in your systems or machines and allow you a more flexible planning. A 60W DIN rail power supply in a 36 x 90 x 91mm (WxHxD) housing is currently unique in the market. This results in completely new space opportunities for you.

Focus on core features.

The most important characteristic of the PIANO devices is their focus on the core features of a power supply: efficiency, lifetime, reliability and size. The very high PULS quality is maintained in each of these features.

Push-in or screw terminals - you decide.

For the PIM60 you can choose between push-in and screw terminals. The push-in terminals reduce installation time, and are very reliable in environments prone to shock and vibration. In addition, they are ideally suited for robot-assisted wiring processes.

The screw terminals, that accommodate large diameter wires, are still popular in environments with minimal shock and vibration.

Growing power supply family.

With the new PIANO Mini products, PULS now provides a complete, cost-oriented product family in the 36-480W power range.

SPECIFICATIONS

Input voltage range	Wide-range
Number of phases	1
Input voltage AC	100-240 V
Input voltage ac min	90 V AC

Input voltage ac max	264 V AC
Inrush current at 120 V ac typical	15 A
Inrush current at 230 V ac typical	36 A
Power Factor at 120 V AC, full load. Typical	0.55
Power Factor at 230 V AC, full load. Typical	0.47
Supply Frequency	50-60 ±6 %
Power Consumption At 120 V AC	1 A
Power Consumption At 230 V AC	0.6 A
Type Power Supply	AC-DC

Output voltage	12 V DC
Output voltage min	12 V DC
Output voltage max	15 V DC
Output Current	5 A
Effect	60 W
Power Reduction Of 60 To 70 ° C	2.4 W/°C
Ripple. max	100 mV pp
Temperature Range Without Derating From	-10 °C
Temperature Range Without Derating To	60 °C






Efficiency At 120 V AC, full load. Typical	90.2 %
Efficiency At 230 V AC. Typical	89.6 %
Efficiency At 230 V AC, full load. Typical	90.7 %
Lifetime at 120 V ac, full load and +40 ° C	103000 h
Lifetime at 230 V ac, full load and +40 ° C	119000 h

Width	36 mm
Height	90 mm
Depth	91 mm
Weight	0.225 kg

Clamp type	Screw
-------------------	-------

Series	Piano
Approvals	CB, CE, cULus
Material Protection	Polycarbonate

Hold-up time at 120 V AC, full load. Typical.	23 ms
Hold-up time at 230 V AC, full load. Typical.	107 ms
IP Class	IP20

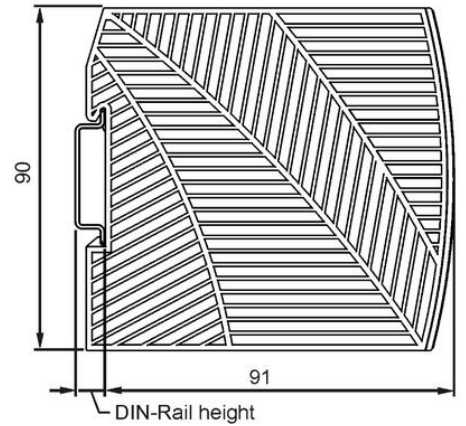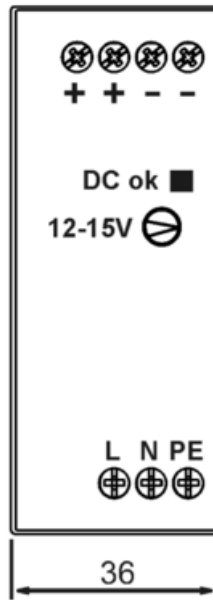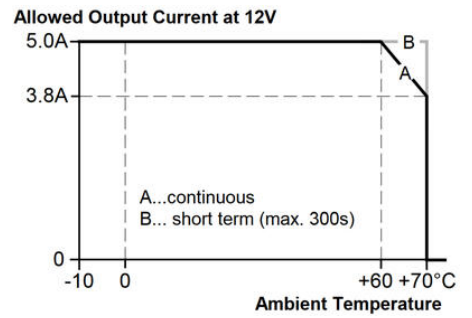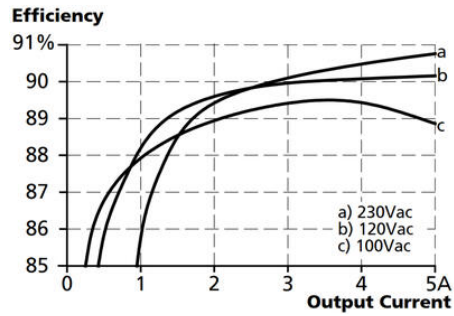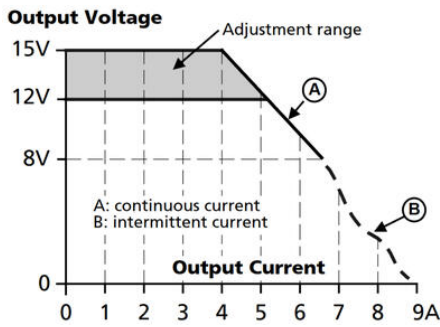

All dimensions in mm