

C12 INTERFACE RELAY

2-pole 5 A

C12A21X12A

Relay 8 Pin 2 Pole LED 12V ac

- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components



PRODUCT DESCRIPTION


SPECIFICATIONS

Working Un	0,8-1,10
Nominal power ac	1.1 VA
Coil Voltage AC	12 V AC
Voltage Min	0.6 V
Oversvoltage UNX Max	1.1
Response Time	10 ms

Number Of Contacts	2
Contact Material	AgNi + 0,2 μ Au
Switching Capability Voltage	250 V
Breaking Capacity Current	5 A
The Recommended Maximum Load	5 A/250 V AC 1; 0,5A/110 V DC-1
Recommended Min Load	10 mA/10 V
Surge Current (20Ms)	15 A
Bounce Time	1
Release Time	5 ms
Release Time Kontaktstudstid	8 ms


IP Class	IP40
Isolation Contact / Contact	3000 V

Isolation Contact / Coil	5000 V
Frequency	50 Hz
Optional Coil	X (LED)
Weight	21 g


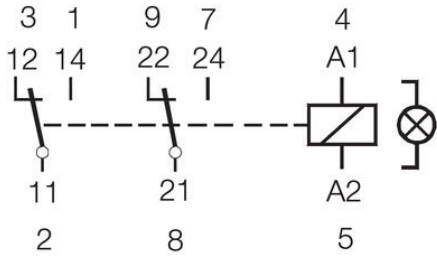


C12-A21X

5A 250V AC-1
5A 30V DC-1



A2 — A1



CE EAC

Made in India

