

C10 INTERFACE RELAY

1-pole 10 A

C10G10X110D
RELAY IRC HDC LED 110VDC LED

- Robust flat pins, for industrial applications
- Both mechanical and LED indication
- Colour-coded test button
- Twin contact for low loads




PRODUCT DESCRIPTION

SPECIFICATIONS


Nominal power dc	0.7 W
Coil Voltage DC	110 V DC
Overvoltage UNX Max	1.1
OFF-Voltage Un Max	0.1
Number Of Contacts	1
Contact Material	AgNi
Switching Capability Voltage	250 V
Breaking Capacity Current	10 A
Recommended Min Load	10 mA / 10 V
Surge Current (20Ms)	30 A
Release Time	8 ms
Release Time Kontaktstudtid	8 ms
IP Class	IP40
Insulation Class EN60947	250 V (pollution 3, Group C)
Temperature range from	-40 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C

Temperature range to	70 °C
Frequency	50 Hz
Optional Coil	X (LED)
Approvals	CCC, CE, RoHS, UL, Gost R
Type of relay	Industrial relays

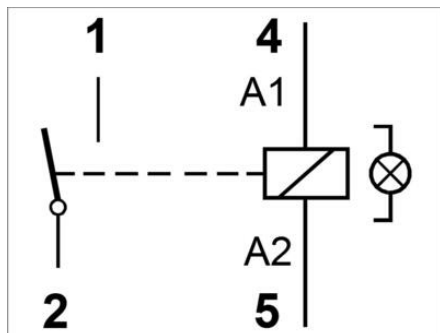


C10-G10X

10A 250V AC-1
10A 30V DC-1



A2 — A1

03

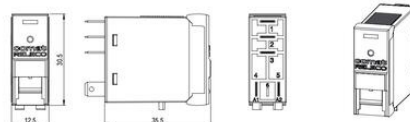

CE EAC

Made in India

