

LCIS ANALOGUE/ANALOGUE CONVERTER, ADJUSTABLE

750539.0000

Signal Converter Stand.signaler 3-vägs

- 6,2mm wide
- Input and output selectable via DIP switch
- Automatic calibration
- DNV GL approved




PRODUCT DESCRIPTION

Microcompact splitter features common standard signals and a DIP switch for selecting the input and output signal. The converter is self-calibrating which ensures easy installation. The converter features 3-way galvanic isolation, each terminal can be connected by jumper comb. Extremely compact design, width of 6,2mm only. Can be installed in any position.

SPECIFICATIONS



Approvals	CSA, DNV, UL
Cross Section Max	2.5 mm ²
Cross section min	0.25 mm ²
Depth	73 mm
Height	93 mm
Input impedance current mA	100 Ω
Input impedance voltage	330 kΩ
Insulation voltage in/out	2500 V
IP Class	IP20
Linearity	0,05 % FSR
Load impedance power	500 Ω
Load impedance voltage	Min. 2 kΩ
Manual switch	No
Power Supply AC max	26.4 V

Power Supply AC min	19.2 V
Power Supply DC max	31.2 V
Power Supply DC min	18 V
Reaction time	17 ms
Rise Time	6 ms
Switching Frequency max	30 Hz @ 3 dB
Temperature coefficient	<150 ppm/° K FSR
Temperature range bearing, from	-40 °C
Temperature range bearing, to	85 °C
Temperature range from	-25 °C
Temperature range to	60 °C
Weight	30 g
Width	6.2 mm

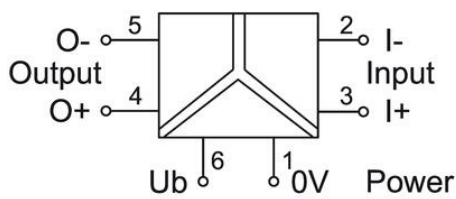

S1	Input	1	2	3	4
● → Switch On		●			
0–10V*		●			
0–20mA			●		
4–20mA		●	●		

S1	Output	5	6
● → Switch On		●	
0–10V*		●	
0–20mA			●
4–20mA		●	●

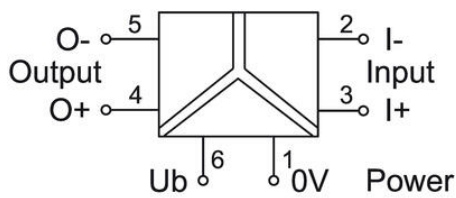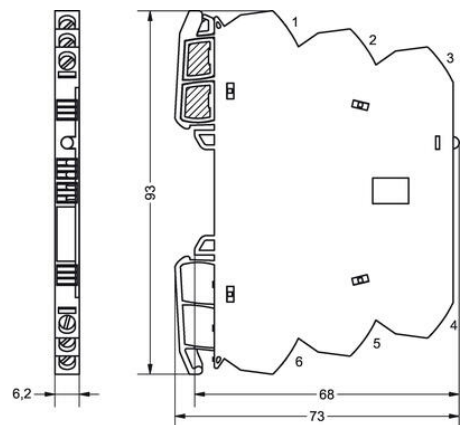

S1	Input	1	2	3	4
● → Switch On		●			
0–10V*		●			
0–20mA			●		
4–20mA		●	●		

S1	Output	5	6
● → Switch On		●	
0–10V*		●	
0–20mA			●
4–20mA		●	●

