
CONTACLIP

PRESSURE SPRING DOUBLE/TRIPLE DECK TERMINALS FRKD

FRKD,FSLD,

3226.1
FRKD 2.5 Green, 2.5mm² Push-in double deck

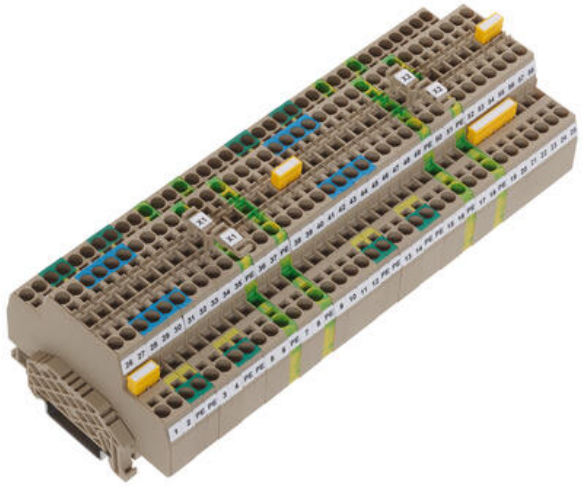

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	CSA, CSA US, KEMA KUR, EAC
Color	Green
Connections	2 x 2
Contamination degree	3
Country of origin	BG
Cross connect channels	2
Cross section single wire from	0.2 mm²
Cross section single wire to	4 mm²
Cross section stranded wire from	0.2 mm²
Cross section stranded wire to	4 mm²
Cross section stranded with ferrule from	0.2 mm²
Cross section stranded with ferrule to	2.5 mm²
Cross-Section	2.5 mm²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	53 mm

Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	75.4 mm
Mounting	TS 35/7,5
Number of levels	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	20 A
Rated current CSAus	20 A
Rated Current IEC	24 A
Rated impulse voltage	6 kV
Rated voltage CSAus	300 V
Rated Voltage IEC	500 V
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Stripping Length	12 mm
Tariff code	85369010
Voltage CSA	300 V
Weight	14.57 g
Width	5.1 mm

