

NH FUSE-LINKS NH3, AM

500 V AC, 690 V AC

NH3AM50V355

Fuse-link NH3 aM 500 V 355 A

- Size 3
- Silver-plated copper contacts
- Ceramic body
- Breaking capacity 80/120 kA



PRODUCT DESCRIPTION



Mersen/Ferraz Shawmut aM type NH fuses are suitable for protecting motor circuits. Partial range breaking capacity. Suitable for short-circuit protection only, interrupts current from 6,3 x In up to maximum breaking capacity. They must be associated with other switchgear for protection against overloads. These fuse-links can have a rated current equal to the motor's nominal current.

Characteristics

- Dimensions according to DIN 43 620 Parts 1 to 4
- Non-Isolated metal gripping slugs
- Double indicator
- Lead-free connectors
- 0% cadmium

SPECIFICATIONS

Approvals	BV, CB, CE, DNV, KEMA KEUR, Lloyd's, VDE
Breaking Capacity	120 kA
Characteristic (CVL)	aM
Indication (CVL)	Visual, Striker
Manufacturer Part No	Q232521
Nominal current	355 A
Pack Size	1
Voltage AC max	500 V

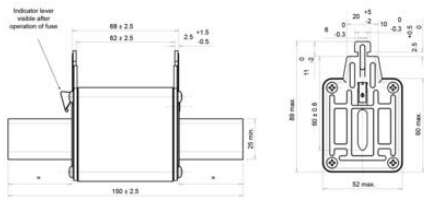

Visibility of red indicator signals conduction of the fuse link.
After operation the red indicator is no longer visible.

