

## NH FUSE-LINKS NH3, AM

500 V AC, 690 V AC

NH3AM50V400

Fuse-link NH3 aM 500 V 400 A

- Size 3
- Silver-plated copper contacts
- Ceramic body
- Breaking capacity 80/120 kA



### PRODUCT DESCRIPTION



Mersen/Ferraz Shawmut aM type NH fuses are suitable for protecting motor circuits. Partial range breaking capacity. Suitable for short-circuit protection only, interrupts current from 6,3 x In up to maximum breaking capacity. They must be associated with other switchgear for protection against overloads. These fuse-links can have a rated current equal to the motor's nominal current.

#### Characteristics

- Dimensions according to DIN 43 620 Parts 1 to 4
- Non-Isolated metal gripping slugs
- Double indicator
- Lead-free connectors
- 0% cadmium

### SPECIFICATIONS

<b>Approvals</b>	BV, CB, CE, DNV, KEMA KEUR, Lloyd's, VDE
<b>Breaking Capacity</b>	120 kA
<b>Characteristic (CVL)</b>	aM
<b>Indication (CVL)</b>	Visual, Striker
<b>Manufacturer Part No</b>	R232522
<b>Nominal current</b>	400 A
<b>Pack Size</b>	1
<b>Voltage AC max</b>	500 V

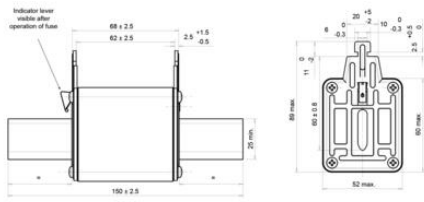

Visibility of red indicator signals conduction of the fuse link.  
After operation the red indicator is no longer visible.

